


### 3. Extreme Environment Cast Aluminum Vandalproof Luminaire

# CVA



#### DIMENSIONS

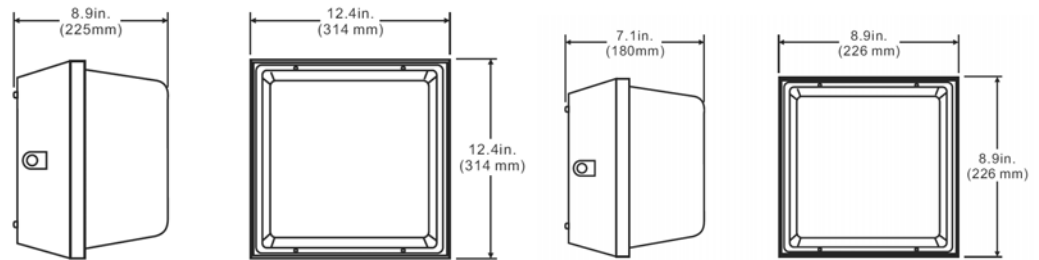

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Ideal for parking garages, correctional facilities, recreational areas, institutions, schools, and any area where vandalism is a concern. Threaded 1/2" IPS tapped holes on side and back of unit for either wall or ceiling mount. Suitable for indoor or outdoor applications. Neoprene gasketing for dust, moisture and insect resistance. Optional tamperproof hardware. Optional light shield to eliminate up light component for flush wall mount. Available in 9" and 12" square. 9" accommodates up to 100w HPS, 70MH and 2PL9CF 12" accommodates up to 150PSMH, 150HPS and up to 42W CF.

#### ORDERING

#### HOUSING

Heavy die cast aluminum housing for durability and corrosion resistance.

#### ELECTRICAL

For metal halide lamping, ballast is high power factor, constant wattage auto transformer for optimum heat dissipation. For high pressure sodium, ballast is normal power factor reactor type for 120V. Compact Fluorescent ballast is electronic, universal voltage, 26 and 42.

#### SHIELDING

.125 thick multi-patterned injection molded clear prismatic polycarbonate with ultraviolet inhibitors to minimize discoloration and add strength. Also available in opal prismatic.

#### FINISH

Exterior housing is finished in architectural bronze. Optional white finish. All interior surfaces are finished in high gloss baked white enamel for maximum reflectivity and illumination.

#### CERTIFICATION

All units bear UL and Made in U.S.A. label. UL listed for wet location (ceiling mount) and damp location (wall mount).

MODEL	WATTAGE	TYPE	FINISH	VOLTAGE
CVA9	70	PSMH – Pulse Start Metal Halide	BZ- Bronze Finish	120
	70 100	HPS – High Pressure Sodium	BK- Black Finish	277 480
	2PL9	CF – Compact Fluorescent	WH- White Finish	MULTI
CVA12	70 100 150	PSMH – Pulse Start Metal Halide	CC- Custom Color	
	70 100 150	HPS – High Pressure Sodium		
	2-PL13 2-PL26 2-PLC42	CF – Compact Fluorescent		

#### OPTIONS:

- TP – Tamperproof Hardware
- PC – Photocell
- WG – Wire Guard
- GLR – Fusing
- QZ – Quartz Restrike
- GS – Glare Shield (Visor)
- EM – 90 Min. Emergency Battery Back-Up (For Compact Fluorescent Only)
- OPAL – Opal Prismatic Lens



JOB NAME:
FIXTURE TYPE:
MODEL NO: