




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

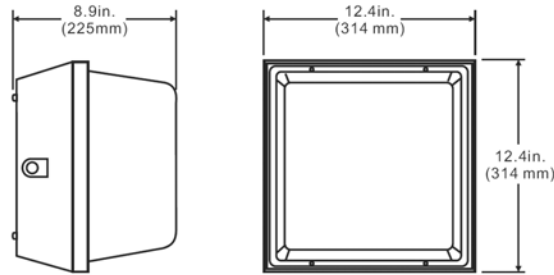

ORDERING

Available in 70 watt or 100 watt State of the Art Induction lamping. Induction lamp provides a High Maintained lumen output with a CRI of 80 for vivid, natural colors. 100,000 hour rated life with low lumen depreciation translates to significant savings in maintenance costs compared to HID sources. Threaded 1/2" IPS tapped holes on side and back of unit for either wall or ceiling mount. Suitable for indoor or outdoor applications. Neoprene gasketing for dust, moisture and insect resistance. Optional light shield to eliminate up light component for flush wall mount. 9" accommodates up to 100w HPS, 70MH and 2PL9CF. 12" accommodates up to 175MH, 150HPS and up to 42W CF.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
CVAIND	70 100	IND- Induction	120 277 UNV

HOUSING

Heavy die cast aluminum housing for durability and corrosion resistance.

ELECTRICAL

Generator operates 120-277V and provides stable output that is relatively unaffected by fluctuations in line voltage. Requires no warm-up time to reach 90% of lumen output making it suitable for sensor applications. Performs in temperatures from -20° to +60°

FINISH

Exterior housing is finished in architectural bronze. Optional white finish. All interior surfaces are finished in high gloss baked white enamel for maximum reflectivity and illumination.

CERTIFICATION

All Induction components bear UL label. Unit is listed for wet and damp locations.

OPTIONS:

- TP** – Tamperproof Hardware
- PC** – Photocell
- WG** – Wire Guard
- GLR** – Fusing
- QZ** – Quartz Restrike
- GS** – Glare Shield (Visor)
- OPAL** – Opal Prismatic Lens



JOB NAME:
FIXTURE TYPE:
MODEL NO: