



3. Extreme Environment

Dust/Moisture Resistant Luminaire

DMR

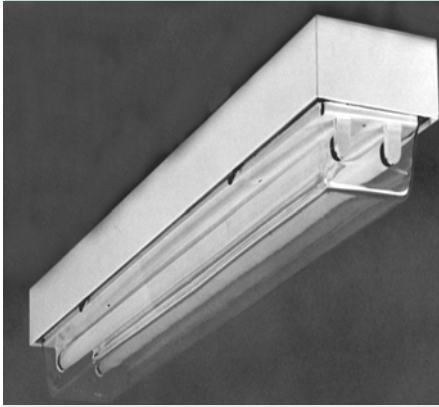

DIMENSIONS

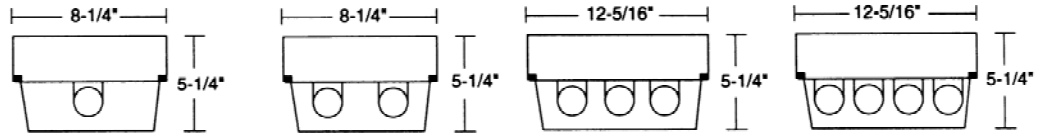

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Enclosed and gasketed design for dust and moisture resistance. The perfect choice for areas where high light levels are required and where lamps must be enclosed. Clear lens is standard to allow maximum light transmission. Opal acrylic lens and high impact DR acrylic are optional. Heavy duty gasket along housing end and side lips used in conjunction with rust resistant cam latches assure tight diffuser to housing fit. Available in 4' length, in 1, 2, 3 and 4 light configurations, 8' lengths in 1 and 2 light configurations. Rapid start, slimline, and high output T5, and T8 lamps.

HOUSING

Die formed heavy gauge steel welded at the ends to insure rigidity. Optional aluminum housing for 1 and 2 light units only.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All metal parts are painted after fabrication with premium grade white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
DMR	1	32T8	120V
	2	28T5	277V
	3	54T5HO	UNV
	4		
	1	32T8-8TD	
	2	28T5-8TD	
		54T5HO-8TD	
		96T8	
		96T8HO	

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- OPAL** - Opal Acrylic
- Add prefix A** - Aluminum Housing (i.e. ADMR)
- PRISDR** - 25% Prismatic DR Acrylic
- ST** - Stem Mounted (length in inches)



JOB NAME:
FIXTURE TYPE:
MODEL NO: