


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

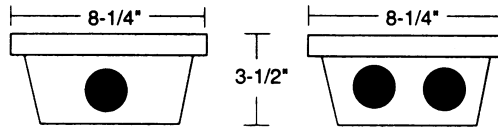

ORDERING

Available in 2' and 4' lengths in 1 or 2 light versions in T8, TT5 Biax and T5 applications. Ideal for Correctional Facilities, Recreation Areas, Schools and area where vandalism is a concern. This versatile fixture can be surface, or wall mounted. Optional Integral occupancy sensor is field adjustable for time and sensitivity. Optional corner mount box

HOUSING

Heavy gauge die formed cold rolled steel with 1/4" holes and 7/8" KO for secure mounting.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

.125 thick multi-patterned injection molded polycarbonate lens with ultraviolet inhibitors to minimize discoloration and add strength.



FINISH

All parts standard with high gloss baked white enamel finish with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant. Optional Wet Location label with neoprene gasketing for ceiling mount only. Listed for damp location.

MODEL	LENGTH	LAMP QTY	WATTAGE	VOLTAGE
MVA	2-	1	17T8	120V
	2' unit	2	14T5	277V
		3	BX40	UNV
	4-	1	32T8	
	4' unit	2	28T5	
		3		

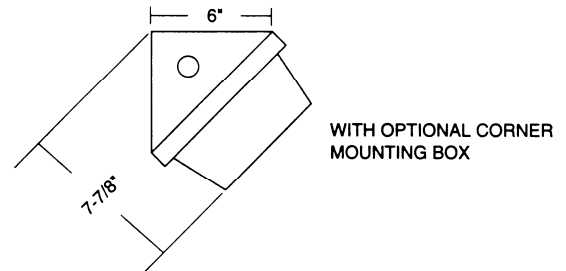

OPTIONS

- EM - Emergency
- DM - Dimming
- COR - Corner Mount Box
- GSK - Neoprene Gasketing (for Wet Location)
- SC - Surface Conduit Back Box
- TP - Tamperproof Hardware
- TSD - Tamperproof Screwdriver
- WL - Wet Location Label (ceiling mount only)
- OC- Integral Occupancy Sensor



JOB NAME:
FIXTURE TYPE:
MODEL NO: