


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

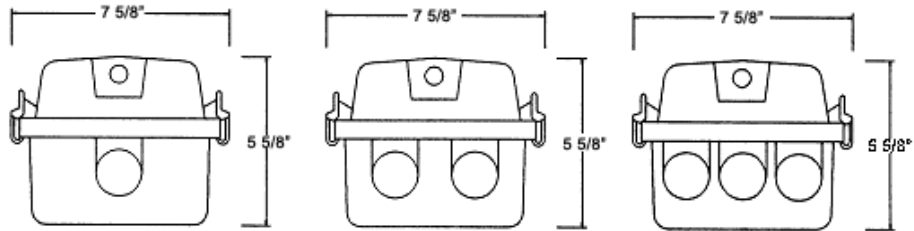

Available in 4' and 8' lengths, 1, 2 & NEW 3 lamp configurations. Weather resistant molded fiberglass reinforced housing ideal for areas where moisture protection is required. Interior metal parts finished in premium grade white enamel for maximum reflectance and durability. Neoprene gasket bonded to inside perimeter of the housing provides dust and moisture resistance. Molded cam latches insure tight seal. Six latches provided on the 4' housing, twelve on the 8' housing. Tamperproof and Stainless Steel latches are optional. For surface or pendant mounting. Chain mounting kit optional. For individual or continuous row with optional water-tight hubs. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel housing completely enclosed in a heavy duty gasketed high impact polyester fiberglass housing.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Acrylic lens with pebbled pattern interior is standard. Opal acrylic, prismatic polycarbonate, or high impact 100% DR acrylic diffusers are optional.

CERTIFICATION

All units bear UL and Made in U.S.A. labels. Wet Location labeled. For National Sanitation Foundation (NSF) approval (consult factory).

ORDERING

MODEL	LAMP QTY	WATTAGE/TYPE	VOLTAGE	
PVT	1	32T8	120V	
	2	96T8	277V	
	3	96T12		
		48T12HO		
		96T12HO		
		28T5		
		54T5HO		
		1	48T12HO	
		2	96T12HO	
		2	32T8-8TD	
	4	28T5-8TD		
		96T8		
		96T12		
		96T12HO		
		54T5HO-8TD		

OPTIONS:

- EM -Emergency
- SSB-T12 – Electronic Ballast for T12
- UNV – Universal Voltage (T8, T5 & T5HO Only)
- SA95 – High Efficiency Specular Reflector
- SA87 – Specular Reflector
- WH92 – High Efficiency White Reflector
- HI – High Performance Ballast
- LEX – Prismatic Polycarbonate (Lexan) Lens
- 100DR – 100% DR acrylic Lens
- OPAL – Opal Acrylic Lens
- SSL – Stainless Steel Cam Latches
- HUB – Wet Location Hub
- SS95 – High Efficiency Aluminum Reflector
- SA85 –Aluminum Reflector
- TP – Tamperproof Hardware



JOB NAME:
FIXTURE TYPE:
MODEL NO: