


### 3. Extreme Environment

### All Aluminum Area Luminaire

# S4000



#### DIMENSIONS

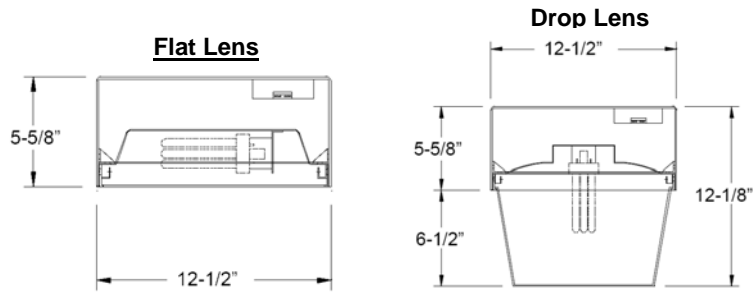

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Ideal for canopies, parking garages, walkways and recreational areas where high quality illumination is required. Designed for flush ceiling mount, pendant mount or wall mount cast aluminum arm and canopy. Suitable for indoor or outdoor applications. Gasketed door frame retains lens and provides for dust, moisture and insect resistance. Available with drop prismatic acrylic or polycarbonate lens. Optional flat tempered glass lens. Drop lens units accommodate up to 175W MH, 100HPS and 2PLC42CF S4000F Flat Glass units accommodate up to 100MH, 100HPS and 2-PLC42W CF

#### HOUSING

.090" thick spun aluminum housing for durability and corrosion resistance.

#### ELECTRICAL

For metal halide lamping, ballast is high power factor, constant wattage auto transformer for optimum heat dissipation. For high pressure sodium, ballast is normal power factor reactor type for 120V. Compact Fluorescent supplied with Electronic univolt ballasts.

#### SHIELDING

.125 thick multi-patterned injection molded clear prismatic drop acrylic and polycarbonate with ultraviolet inhibitors to minimize discoloration and add strength. Also available with flat prismatic tempered glass.

#### FINISH

Exterior housing is finished in textured architectural bronze. Optional textured black, white and silver painted finishes. All interior surfaces are finished in high gloss baked white enamel for maximum reflectivity and illumination.

#### CERTIFICATION

UL listed for wet location (Flush ceiling and wall mount) and damp location (pendant mount).

#### ORDERING

MODEL	LAMP QTY/WATTAGE/TYPE	FINISH	VOLTAGE
<b>S4000</b>	50	<b>PSMH-</b>	120
	70	Pulse Start	277
	100	Metal Halide	<b>BK-</b>
	150		Black Finish
	175		<b>WH-</b>
<b>S4000F</b>	50	<b>HPS-</b>	White Finish
	70	High Pressure Sodium	<b>SL-</b>
	100		Silver Finish
			<b>CC-</b>
			Custom Color
<b>S4000F</b>	(1 or 2) PLC18	<b>CF-</b>	
	(1 or 2) PLC26	Compact	
	(1 or 2) PLC32	Fluorescent	
	(1 or 2) PLC42		

#### OPTIONS:

- ACR** – Acrylic Drop
- LEX** – Polycarbonate Drop
- GLR** – Single Fuse
- QZ** – Quartz Restrike
- FGL** – Flat Tempered Glass (100W Max)
- WM** – Wall Mount
- PM** – Pendant Mount

JOB NAME:

FIXTURE TYPE:

MODEL NO:

