


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

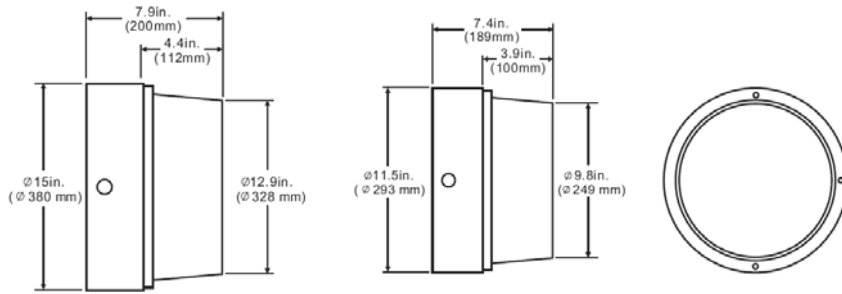

ORDERING

Available in 11" and 15" diameters. Ideal for correctional facilities, recreational areas, public buildings, schools, terminals, and other applications where vandalism is a concern. Wall or ceiling mount, for indoor or outdoor applications. Gasketing between housing and mounting surface is standard to assure weather-tight installation.

HOUSING

Die formed heavy gauge steel pan with aluminum back box is standard

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Multi-patterned injection molded clear prismatic polycarbonate with ultraviolet inhibitors. Optional smooth white opal polycarbonate diffuser.

FINISH

Housing powder coated in Dura-White for durable finish. Back box powder coated in Dura-Bronze.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant. Optional wet location listing for ceiling mount only.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
WARD11 - 11" unit	1	100 150	PSMH- Pulse Start Metal Halide	120V 277V UNV
	1	22W 32W 32W/22W	CF- Compact Fluorescent	
	1	70(ED17) 100(ED17) 150(ED17)	HPS- High Pressure Sodium	
WARD15- 15" unit	2	PL7	CF-	
	3	PL9 PL7/PL9 PL13 PLC26	Compact Fluorescent	

(For incandescent applications, please consult factory.)

OPTIONS:

- EM** – Emergency
- GSK-L/H** – Lens to Housing Gasket
- TP** – Tamperproof Hardware
- TSD**– Tamperproof Screwdriver
- OPAL** – White Opal Lens

JOB NAME:
FIXTURE TYPE:
MODEL NO:

