


### 3. Extreme Environment

### Vandalproof Fluorescent

# VA



#### DIMENSIONS

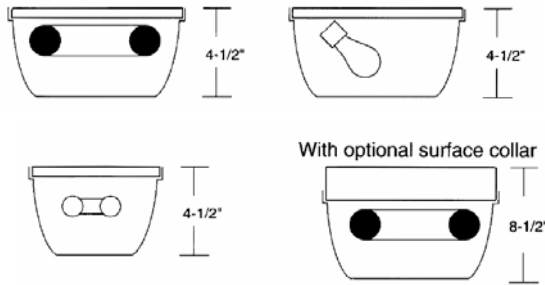

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



#### ORDERING

Available in incandescent up to 60W, fluorescent in Circline 20W and 22W and energy efficient PL lamps. Available in the following sized: 6"x8", 8"x8", 12"x12" and 6"x10" nominal sizes for a variety of lamp configurations. Ideal for correctional facilities, recreational areas, institutions, schools, and any area where vandalism is a concern. Wall or ceiling mount for indoors or outdoors. Optional neoprene gasket for dust, moisture, and insect resistance. Slotted screws are standard. Spanner head screws are optional.

#### HOUSING

Die formed housing in heavy gauge steel. Optional aluminum housing.

#### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

#### SHIELDING

.125" thick multi-patterned injection molded clear prismatic polycarbonate with ultraviolet inhibitors. Also available with smooth opal lens.

#### FINISH

All parts finish with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

#### CERTIFICATION

All units bear UL label. Made in U.S.A. UL listed for damp location. ARRA and BAA compliant. Optional wet location label for ceiling mount only.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
<b>VA6</b> 8" x 6" unit	1	60A19 PL7 PL9 PL13	120V 277V
<b>VA8</b> 8" x 8" unit	1 2	60A19 20W PL9 PL13	
<b>VA12</b> 12" x 12" unit	1 2	60A19 PL13 PL26 PL42 20W 22W	

#### OPTIONS:

- EM** – Remote Emergency Battery Pack
- SC** – Surface Conduit
- AH** – Aluminum Housing
- OPAL** – Smooth Opal Polycarbonate
- TP** – Tamperproof Hardware
- TSD** – Tamperproof Screwdriver
- GSKT** – Gasketing
- WL** – Wet Location



JOB NAME:
FIXTURE TYPE:
MODEL NO: