


1. Recessed

Recessed Grid Indirect Side Basket

D/I



DIMENSIONS

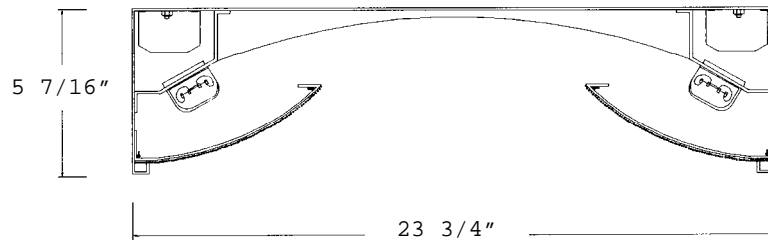

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Provides indirect, soft, uniform illumination. Curved perforated details combine recessed fixture advantages with efficient indirect shielding. Perforated side baskets, backed with reflective white acrylic, control glare and veiling reflections, Shielding is easily removed for re-lamping. Flanged fixture available for plaster ceilings.

HOUSING

Die formed 20 gauge steel housing unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Perforated diffuser elements with matte white acrylic overlays.

FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with an electrostatically applied high temperature baked matte white enamel for superior quality and durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

ORDERING

<u>MODEL</u>	<u>SIZE</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
D/I	2 -	2	17T8	120
	2x2 unit	4	14T5 24T5HO	277 UNV
		2	BIAX40 BIAX50 BIAX55	
	2 -	2	32T8	
	2x4 unit	4	28T5 54T5HO	
		4	BIAX40 BIAX50 BIAX55	

Consult factory for asymmetric 1x4 unit.

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- M** - Flanged Unit
- HR** - Heat Removal

JOB NAME:

FIXTURE TYPE:

MODEL NO:

