


# 1. Recessed

# High Efficiency T5/T8 Direct/Indirect

# D7



## DIMENSIONS

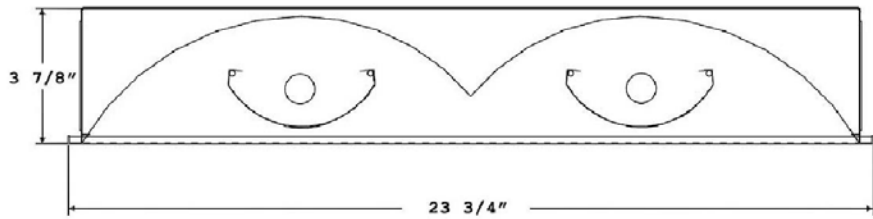

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



## ORDERING

Contemporary design provides soft, uniform illumination throughout the space. Twin diffusers available in perforated metal with opal inlay, high efficiency frosted acrylic, or contemporary opal acrylic. Extremely efficient fixture allows for the reduction in the amount of fixtures and energy savings. Shielding is easily removed for re-lamping. No tools required to access ballast compartment.

### HOUSING

Die formed heavy gauge steel housing unitized into one piece.

### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

### SHIELDING

Perforated diffuser element with opal inlay is standard. Optional frosted and opal acrylic diffusers available.

### FINISH

All metal parts pretreated with a phosphate bonding process. All viewable parts are powder coated in a matte white finish for superior quality and durability.


### CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL	SIZE	LAMP QTY	WATTAGE/TYPE	VOLTAGE
D7	2 - 2x2 unit	2	14T5 24T5HO 17T8 31UT8	120 277 UNV
	2 - 2x4 unit	2	28T5 54T5HO 32T8	

### OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- GLR - Fused
- HR - Heat Removal
- FA - Frosted Acrylic
- OP - Opal Acrylic
- Prefix SD7 - Surface Mount Fixture

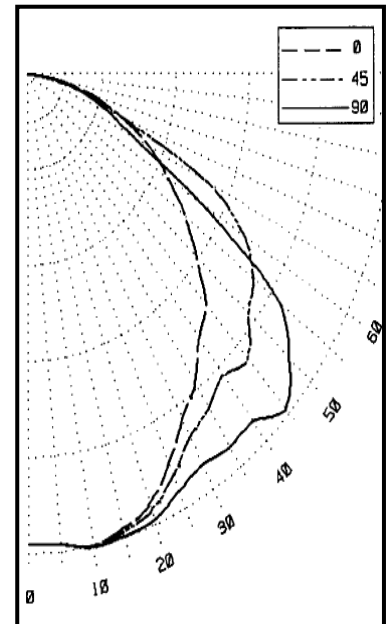

JOB NAME:
FIXTURE TYPE:
MODEL NO: