


# 1. Recessed

# Cove Mount Accent Light

# COV



## DIMENSIONS

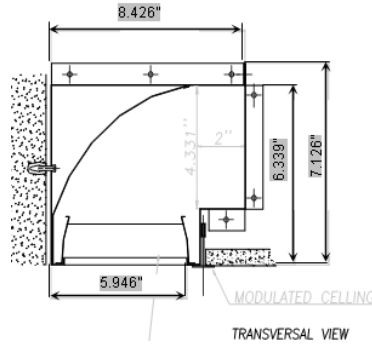

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



## ORDERING

Perimeter light source provides excellent wall washing from a concealed source. Choice of parabolic louver, acrylic lens or open, unshielded. Available with or without internal reflector. Factory assembled to exact specified lengths.

### HOUSING

Die formed heavy gauge steel with anti-rust protection.

### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

### SHIELDING/REFLECTOR

Choice of parabolic louver, white cross baffle, acrylic lens, or open unshielded. Standard with white gloss reflector.

### FINISH

All parts finished with post painted white powder coat enamel.

### CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
COV	1	17T8	120
	2	25T8	277
		32T8	UNV
		14T5	
		21T5	
		28T5	
		24T5HO	
39T5HO			
54T5HO			

### OPTIONS:

- EM** - Emergency
- DM** - Dimming (Specify Type)
- PBL** - Parabolic Louver
- ACR** - Acrylic Lens
- WCB** - White Cross Baffle

JOB NAME:
FIXTURE TYPE:
MODEL NO:

