


1. Recessed

Shallow Parabolic Recessed Troffer

PKL



DIMENSIONS

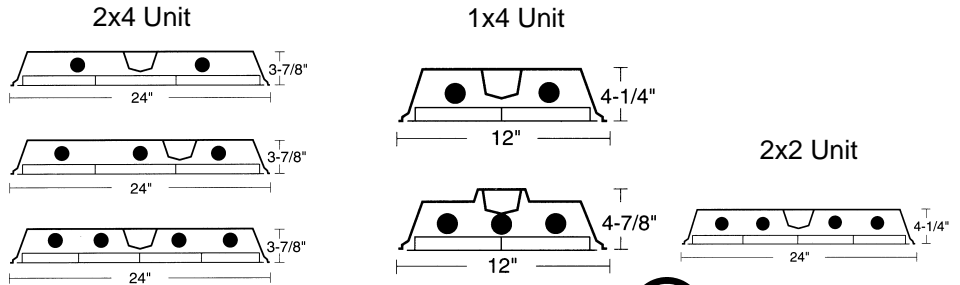

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



Available in 1x4, 2x2, and 2x4 sizes, in 2, 3, and 4 lamp T5, T5HO, and T8 and BIAx in a variety of cell configurations. 1-1/2" deep anodized aluminum parabolic contoured louver provides optimum performance and efficiency while ensuring a high level of visual comfort. Flush steel hinged and latched door frame. Frame hinges from either the open or closed position by die formed steel hinges. Integral T-Bar clips on 2x4 and 2x2 fixtures quickly secure fixture to the grid system without the need for external parts. Fixture housing flanges rolled to eliminate sharp edges. Optional heat removal housing for venting air into plenum. For mounting in exposed T-Bar (grid) ceiling. Optional flanged construction for other ceiling types. For individual or continuous row mounting. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel unitized into one piece. Standard unit supplied as static with flush steel door. Optional 20 gauge housing.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Anodized aluminum louver, precision mitered. Standard finish semi-specular silver. Optional specular silver or white finishes are available.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

ORDERING

MODEL PKL	SIZE	LAMP QTY	WATTAGE/TYPE	CELLS	VOLTAGE
PKL	1- 1x4 unit	2	28T5	8	120
		3	32T8	9	277
		2	54T5HO		UNV
	2- 2x2 unit	2	14T5	9	
		3	24T5HO	16	
		4	17T8	36	
		2	32U6T8 40BX		
		3	31U 1-5/8 T8		
	2- 2x4 unit	2	28T5	12	
		3	54T5HO	18	
4		32T8	24		
			32		
			78		

OPTIONS

- EM - Emergency
- DM - Dimming
- SPEC - Specular Finish Louver
- WHT - Specular Finish Louver
- SA95 - High Efficiency Specular Reflector
- SA87 - Specular Reflector
- WH92 - High Efficiency White Reflector
- MPKL - Flanged Construction
- HR - Heat Removal Units
- 20G - 20 Gauge Housing

JOB NAME:

FIXTURE TYPE:

MODEL NO:

