


1. Recessed

Ultra Shallow Center Drop

US/CD

DIMENSIONS

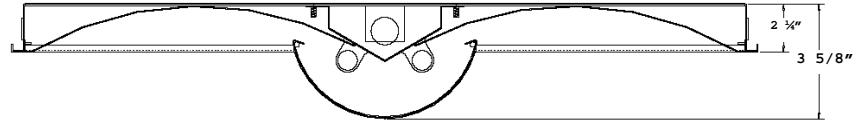

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in 1x4, 2x2 and 2x4 in 2 lamp T5 and T5-HO versions. Provides subtle direct with, soft, uniform indirect illumination. Curved baffle details combine recessed fixture advantages with efficient indirect shielding. Ultra shallow design allows for areas with critically limited plenum space. Optional solid perforated basket. Shielding is easily removed for relamping. Flanged fixture available for plaster ceilings.

HOUSING

Die formed 20 gauge steel housing unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

White split perforated steel diffuser with acrylic inlay. Optional solid perforated basket

FINISH

All metal parts pretreated with a phosphate bonding process and post-painted with electrostatically applied high temperature baked matte white enamel for superior quality and durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA and BAA compliant.

MODEL US/CD	SIZE	LAMP QTY	WATTAGE/TYPE	VOLTAGE
	1x4	2	28T5	120
			54T5HO	277
	2x2	2	14T5	UNV
		3	24T5HO	
			40BX	
	2x4	2	28T5	
3		54T5HO		

OPTIONS

EM - Emergency

DM - Dimming (specify)

Prefix M (M-US/CD15) – Flanged Unit

Prefix S (S-US/CD15) – Surface Mounting

SOLID – Solid Perforated Diffuser

SPLIT – Split Perforated Diffuser

FA – Frosted Acrylic Diffuser

OA – Opal Acrylic Diffuser

JOB NAME:

FIXTURE TYPE:

MODEL NO:

