


# 8. LED

# Recessed LED TROFFER

# D85PLED

## DIMENSIONS

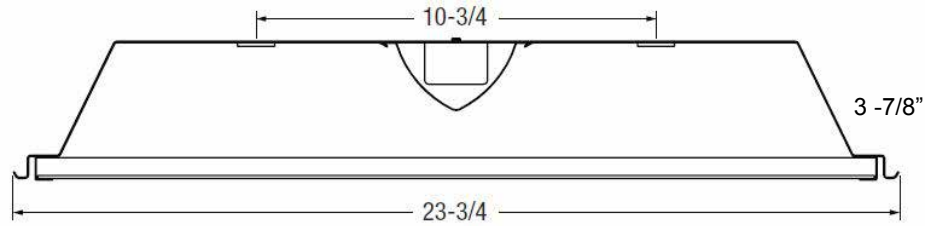

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



## ORDERING

The D85PLED offers the look and feel of a fluorescent luminaire-subtle soft direct elements interest and depth across the ceiling plane with a contemporary look that blends with today's commercial spaces.

For recessed commercial applications such as offices, hospitals, schools etc. Suitable for use in standard 15/16" inverted T-Bar grid ceilings.

### HOUSING

Low Profile troffer body with white enamel finish.

### LED COLOR

3500K or 4000K.

### ELECTRICAL

Driver suitable for 120v-277v operation. Available in 2 wattages to equal or exceed the output of conventional fluorescent lamps.

### SHIELDING

Unique composition provides prismatic look. Specifically formulated, frosted, prismatic acrylic lens provides a diffused luminance, with the effective combination of excellent light transmission and haze.


### FINISH

Matte white, high reflectivity powder coat finish.

### CERTIFICATION

All units bear UL label. ARRA & BAA Compliant. 5 year warranty. DLC Approved.

MODEL	SIZE	WATTAGE	VOLTAGE	LUMENS	CRI
D85PLED	2x2 unit	35W	UNV (120/277)	3267	85
D85PLED	2x4 unit	52W	UNV (120/277)	5335	85

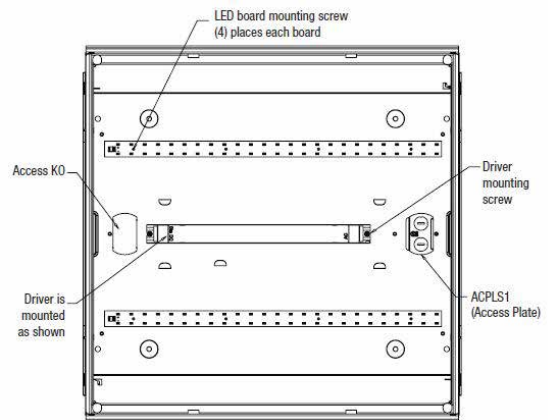

### OPTIONS:

**DM** – Dimming 0-10v

**EM** – Emergency

**20G** – 20 Guage

JOB NAME:

FIXTURE TYPE:

MODEL NO:

