


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

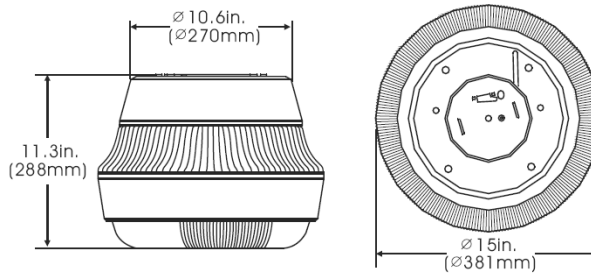

ORDERING

Ideal for parking areas, entrances, walkways, underpasses, loading docks, and on building exteriors. Anodized aluminum reflector offers high reflectivity and ease of maintenance. Consult factory for induction. A 48W LED source is comparable to 150-200W HID.

HOUSING

Heavy duty die-cast aluminum housing.

ELECTRICAL

LM80 certified CREE XPE LEDs, High quality long lasting driver for long life.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

REFLECTOR

One piece anodized aluminum designed reflector for best light efficiency.

CERTIFICATION

Suitable for wet location. UL listed. 3 year warranty.

MODEL
GL2LED


WATTAGE
48

VOLTAGE
UNV (120/277)

OPTIONS:

TP – Tamperproof Hardware

EM – Emergency

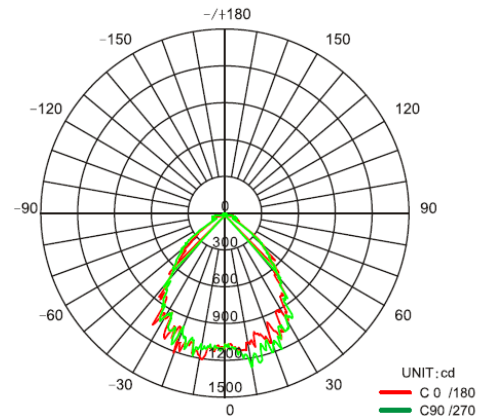

Average Beam Angle(50%): 86.7°

JOB NAME:
FIXTURE TYPE:
MODEL NO:

