



8. LED

LED Recessed Step Light

STLTLED

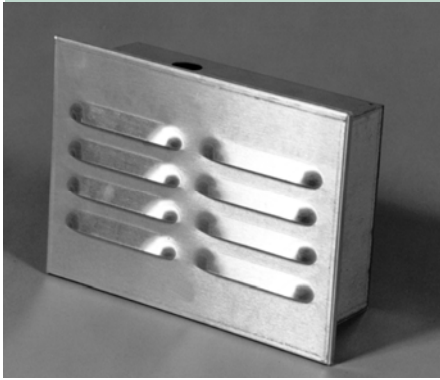

DIMENSIONS

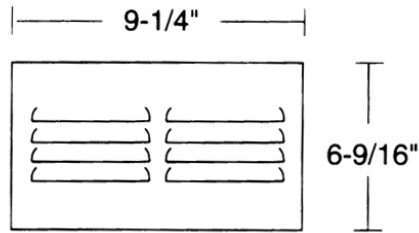

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

Available in 6 and 12 watt LED. Perfect for applications where highly efficient low levels of direct illumination are desirable. Wide variety of front panels available. Tamperproof and Vandalproof units available. Gasketed for dust, moisture, and insect resistance.

ORDERING

HOUSING

20 gauge steel for rigidity. Also available in aluminum and stainless steel.

FACE PLATE

20 gauge steel louvered face is standard. Also available in optional open face. Face plate also available in stainless steel or aluminum.

ELECTRICAL

Highest quality driver, emitters and power supply for long life.

DIFFUSER

Optional open face comes with opal acrylic lens as standard. Consult factory for other lens options.

FINISH

Baked white enamel faceplate is standard.

CERTIFICATION

Made in USA. ARRA and BAA compliant. UL listed. 3 year warranty.

<u>MODEL</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>	<u>FACE PLATE</u>
STLTLED	6W 12W	UNV (120/277)	S – Steel Face (Standard) AL – Aluminum Face SS – Stainless Steel Face

OPTIONS

TP – Tamperproof Hardware
 TW – Thru-Wall Applications (wall thickness)
 OP – Open Face (with opal acrylic lens)
 CC – Custom Color



JOB NAME:

FIXTURE TYPE:

MODEL NO: