


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

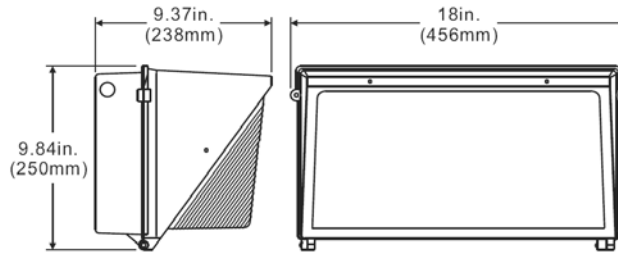

ORDERING

Available in 36W and 48W LED. Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Optional polycarbonate shield or wire guard for vandalproof protection is available. Threaded apertures for conduit and optional photocell provided for flexibility during installation. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. A 36W LED is comparable to 125-150W HID. A 48W LED is comparable to 150-175W HID.

MODEL
WBLED

WATTAGE
36W
48W

VOLTAGE
UNV (120/277)

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

High efficiency electronic constant current Class II 120/277V driver.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

SHIELDING

Borosilicate glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability. Custom colors available.

CERTIFICATION

Suitable for wet location. Made in USA. ARRA and BAA compliant. UL listed. 3 year warranty.

OPTIONS:

- PC** – Photocell (specify voltage)
- VS** – Vandal Shield
- TP** – Tamperproof Hardware
- WG** – Wire Guard
- CC** – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: