

DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

ORDERING

CTLLED - 27 - MD - 120

<u>MODEL</u>	<u>WATTAGE</u>	<u>SPREAD</u>	<u>VOLTAGE</u>
CTLLED	18W 27W 42W	SP MD FL	120

Available in 18, 27 and 42 watt LED. LED technology offers an unprecedented lamp life. This fixture is virtually maintenance-free. Engineered for illumination of retail displays or any area where high efficiency and color rendering are desired. Available with four different track adaptors to fit most existing line voltage systems. Also available with stand alone mono point mounting canopy. An 42W LED is comparable to 70W Metal Halide (depending on color temperature). A 27W LED is comparable to 100W incandescent). Dimming option down to 1% available.

HOUSING

Heavy aluminum alloy housing provides durability and maximum heat sinking for longer life of electronic components.

ELECTRICAL

Highest quality driver, emitters and power supply for long life. Driver 120V AC primary. Input current 0.35A max.

LED COLOR

Available 2700K, 3000K, 3500K. Consult factory for other Kelvin temperatures. CRI-83

OPTICS

Available in 3 beam patterns: Spot, Medium, or Flood.

LENS

Tempered glass lens is standard. Consult factory for optional colored lenses and lens patterns.

FINISH

Exterior housing is finished in white as standard.

CERTIFICATION


CSA Listed. 5 year warranty.

Approved by: _____
Date: _____

OPTIONS

- SP** – Spot Light
- MD** – Medium Light
- FL** – Flood Light
- SL** – Silver (Standard) Reflector
- GL** – Gold (Reflector)
- BLK** – Black
- TA** – Track Adaptor (Specify Halo, Lightolier, or Capri)
- MP** – Monopoint
- CF** - Color Filter (specify)

FLOOD LIGHT

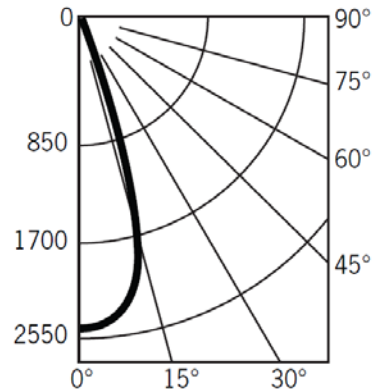

JOB NAME: _____
FIXTURE TYPE: _____
MODEL NO: _____

