


8. LED

FLAT BOARD, Single Or Dual Led Channel

SLED

DIMENSIONS

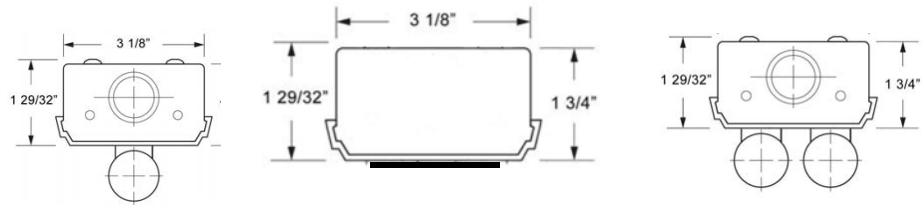

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in 24", 36", 48", 72" and 96" lengths in Flat board, 1 or 2 LED tubes lamp configurations.

Combination snap in end plates double as couplers, eliminate the need for extra hardware in continuous row applications. Snap on cover makes installation quick and easy. Suitable for low density ceiling applications. Symmetric, asymmetric, and light shield reflectors available. For surface or pendant mounting, individual or continuous row mounting. Available with specular aluminum reflector (87% reflectance) high efficiency white reflector (92% reflectance) or high efficiency specular aluminum reflector (95% reflectance).

HOUSING

Die formed heavy gauge steel housing with ample knockouts for ease of installation.

ELECTRICAL

LED: Highest quality driver, emitters and power supply for long life.

FINISH

All parts finished with high gloss baked white enamel with minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL	LAMPS	WATTAGE/TYPE	VOLTAGE
SLED 2' unit	1	9W	120
	2	9W	277
	20W	V2-4.7	UNV
3' unit	30W	V2-4.7	
4' unit	1	18W	
	2	23W	
	40W	V2-4.7	
6' unit	60W	V2-4.7	
8' unit	2	18W	
	4	23W	
	80W	V2-4.7	

LUMENS OUTPUT

V2-4.7--	2'-2400
	3'-3600
	4'-4800
	6'-7200
	8'-9600

OPTIONS

EM - Emergency

DM - Dimming

SA95 - High Efficiency Specular Reflector

SA87 - Specular Reflector

WH92 - High Efficiency White Reflector

SR - Symmetric Reflector

AR - Asymmetric Reflector

LS - Wall Wash Light Shield

AL - Aluminum Housing

JOB NAME:

FIXTURE TYPE:

MODEL NO:

