


# 8. LED

# Recessed Direct/Indirect LED Troffer

# RDBLED



## DIMENSIONS

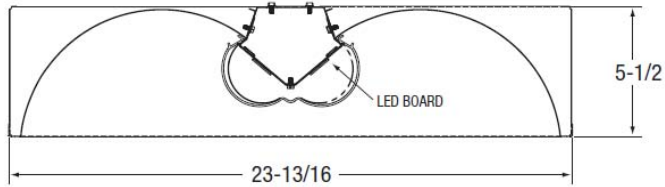

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

## DLC APPROVED

The RDBLED series is designed for recessed applications such as offices, schools and other institutions. It offers the look and feel of a fluorescent luminaire. High reflectance optical engine delivers main beam focus through optically designed acrylic lens. Linear arrayed LED modules provide soft, effective lumination with no hot spots.

### HOUSING

Die formed heavy gauged cold rolled steel. For use with standard 15/16" grid T-bar ceilings with earthquake feature.

### LED COLOR

Standard in 4000K. Consult factory for other Kelvin temperatures.

### ELECTRICAL

Driver suitable for 120v-277v operation. LM80 certified low wattage LED's.

### SHIELDING

Clear wraparound acrylic lens with Lumieo overlay is standard. Optional clear acrylic.

### FINISH

Matte white, high reflectivity powder coat finish.



### CERTIFICATION

All units bear UL label. ARRA & BAA Compliant. 5 year warranty. Pending Design Lights Consortium Approval.

## ORDERING



MODEL	SIZE	WATTAGE	VOLTAGE	LUMENS	CRI
RDBLED	2x2 unit	35W 93.4 L/w	UNV (120/277)	3277	84
RDBLED	2x4 unit	52W 111.9 L/w	UNV (120/277)	5827	84

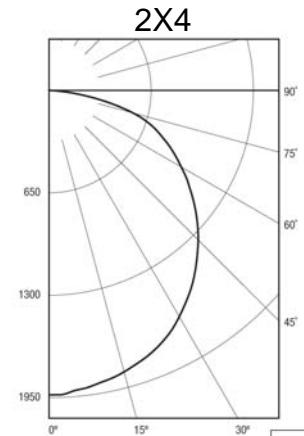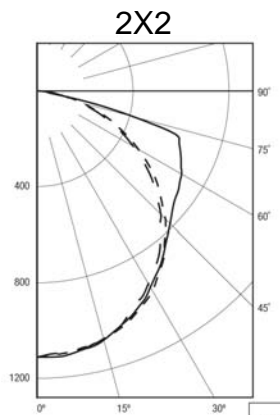

## OPTIONS:

- EM – Emergency
- DM – Dimming
- CA – Clear Acrylic Diffuser



JOB NAME:
FIXTURE TYPE:
MODEL NO: