
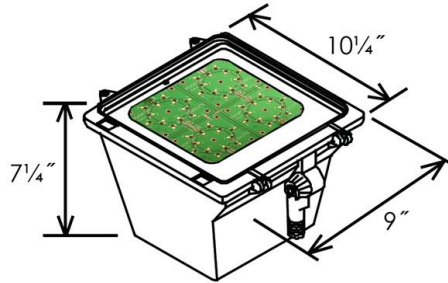


8. LED

Medium Flood Light LED Luminaire

FLLED

DIMENSIONS

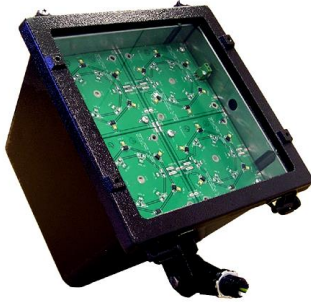

Dimensions

with factory.



Available in 24 watt LED. Housing features threaded 1/2" coin plugs with gaskets for conduit and/or photocell installation. Ideal for residential areas, and/or security lighting. Tempered glass maximizes light distribution. Optional polycarbonate shield or wire guard for vandalproof protection is available. Optional slip fitter available. A 24W LED is comparable to 70-100W HID.

HOUSING

Heavy duty die cast aluminum housing and hinged frame.

ELECTRICAL

High efficiency electronic constant current Class II 120/277V driver.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

SHIELDING

Tempered glass is standard.

FINISH

Textured architectural bronze powdercoat finish over a chromate conversion coating for durability. Custom colors available.

CERTIFICATION

Suitable for wet location. Made in USA. ARRA and BAA compliant. UL listed. 3 year warranty.

ORDERING

<u>MODEL</u>	<u>WATTAGE</u>	<u>VOLTAGE</u>
FLLED	24W	UNV (120/277)
FLLED	34W	

OPTIONS:

PC: Photocell (specify voltage)

GS: Glare Shield

WG: Wire Guard

VS: Vandal Shield

SF: Slipfitter



JOB NAME:

FIXTURE TYPE:

MODEL NO: