
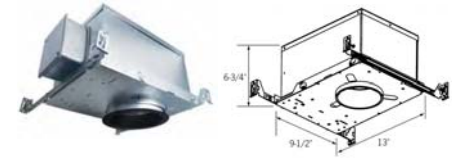



DIMENSIONS

New Construction Housing (Standard)

Insulated Ceiling Housing (ICH)

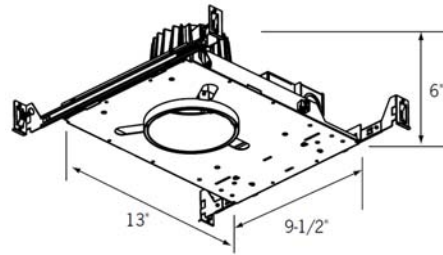

Remodel Housing (RH)

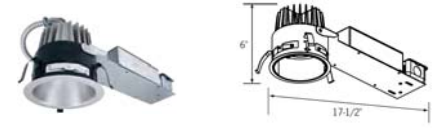

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

ORDERING

The RL4LED is constructed of 168 individual diodes that when driven at a low current, result in a high efficiency system. Available in three color temperatures: 2700K, 3000K, and 3500K with a minimum

HOUSING

Die-cast aluminum heat sink is thermally engineered to maintain an optimal LED junction temperature well within the recommended operating range. This ensures long life and consistent color temperature. A full line of housings are available including the standard New Construction Housing, and optional Insulated Ceiling and Remodel Housing.

ELECTRICAL

Highest quality driver, emitters and power supply for long life.

LED COLOR

Available in 2700K, 3000K or 3500K.

CERTIFICATION

cULus Listed. 5 year warranty.

MODEL
RL4LED

WATTAGE
16W
29W

OPTIONS
27K – 2700 Kelvin
30K – 3000 Kelvin
35K – 3500 Kelvin
EM – Emergency Battery Back-Up
DIM – Dimming
ICH – Insulated Ceiling Housing
RMH – Remodel Housing
TBAR – T-Bar Hanger Kit

Trim Options



SR(Color) – Specular Reflector:
Clear (CLR), Platinum (PLA), or
White (WH)



2PRL – 2 Piece
Reflector w/ Lens



2PR – 2 Piece Reflector
Upper: (CLR Clear or WH White)
Lower Cone: (CLR Clear or PLA
Platinum) Includes glass lens



LWW – Lensed Wall
Wash



2PRB – 2 Piece Reflector w/
Baffle



FGD – Floating Glass
Disc



CAR – Colored Acrylic Ring
(Consult factory for color options)



JOB NAME:
FIXTURE TYPE:
MODEL NO: