


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

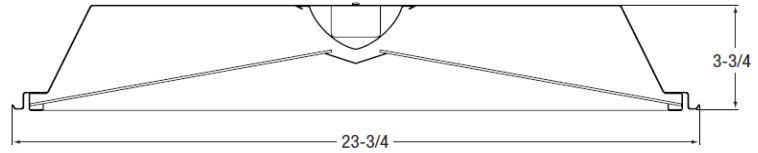

ORDERING

The CVRLED series is designed for recessed applications such as offices, schools and other institutions. It offers the look and feel of a fluorescent luminaire. High reflectance optical engine delivers main beam focus through optically designed acrylic lens. Linear arrayed LED modules provide soft, effective lumination with no hot spots.

HOUSING

Die formed heavy gauged cold rolled steel. For use with standard 15/16" grid T-bar ceilings with earthquake feature.

LED COLOR

Standard in 4000K. Consult factory for other Kelvin temperatures.

ELECTRICAL

Driver suitable for 120v-277v operation. Available in 2 wattages to equal or exceed the output of conventional fluorescent lamps.

LM80 certified low wattage LEDs.

SHIELDING

The Lumieo® acrylic diffuser center "V" adds character to the optical assembly.



FINISH

Matte white, high reflectivity powder coat finish.

CERTIFICATION

All units bear UL label. ARRA & BAA Compliant. 5 year warranty. Design Lights Consortium Certified.

MODEL	SIZE	WATTAGE	VOLTAGE	LUMENS	CRI
CVRLED 2X2-35	2x2 unit	35W 90.7 L/w	UNV (120/277)	3228	84
CVRLED 2X2-40	2x2 unit	35W 90.7 L/w	UNV (120/277)	3228	84
CVRLED 2X4-35	2x4 unit	52W 98.6 L/w	UNV (120/277)	5125	84
CVRLED 2X4-40	2x4 unit	52W 98.6 L/w	UNV (120/277)	5125	84

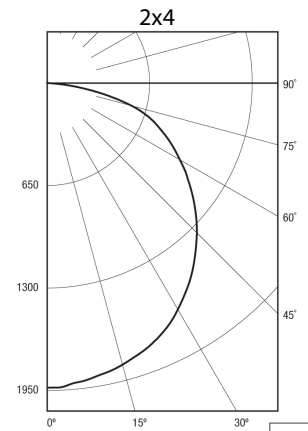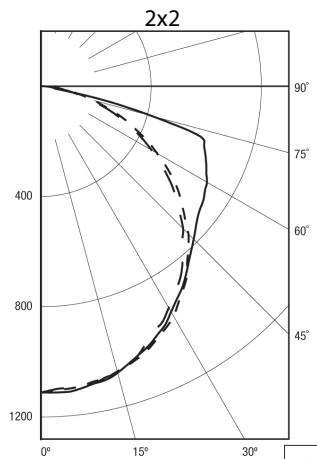

OPTIONS:

- DM** – Dimming
- CA** – Clear Acrylic Diffuser

JOB NAME:
FIXTURE TYPE:
MODEL NO:

