


8. LED

Modular Series-LED Low Bay

MLEDLB2-N

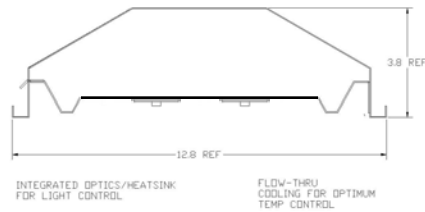

For critical applications, verify all dimensions with factory.

ORDERING

Ideal for factories, warehouses, and gymnasiums where illumination is a concern. Standard with open frame.

Lens is available for areas that require lamp protection.

Consult factory for other options

HOUSING

Die formed 20 gauge steel with knockouts for stem, cable, or chain hangers.

LED EMISSION

Candela Plots

HARMONICS <20%

CRI >83

LUMENS: 14,359

DIMMING

0-10 v 10-100% range

COLOR TEMP

4000K

FINISH

All metal parts post-painted with high gloss baked white enamel with minimum 90% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance. Post painted door frame and ends standard. Post painted units finished in gloss white powder coat.

CERTIFICATION

5 YEAR WARRANTY

ARRA and BAA compliant.

MODEL

MLEDLB2-N

Watts/ LED CHANNELS

136w 2 Flat Board Array

VOLTAGE

120/277

OPTIONS:

EM -Emergency

CP - 6' Cord & Plug (Specify type/voltage)

SC - Safety Chain

OCS- Occupancy Sensor

CK24 - Chain Kit with V hooks (2' length is standard)

HB60Y - 60" Cable Kit with Gripple Type Adjustment



JOB NAME:

FIXTURE TYPE:

MODEL NO: