


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

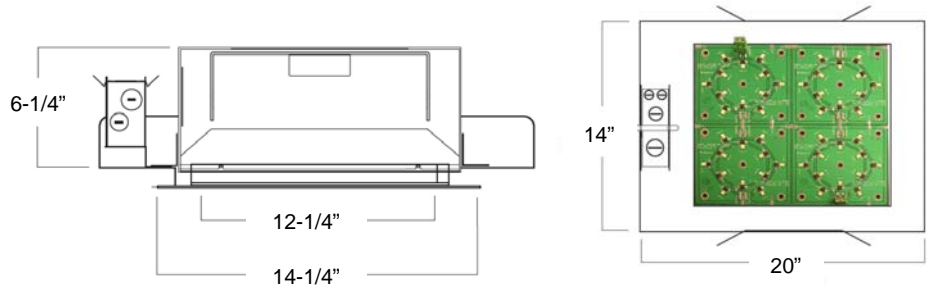

**ORDERING**

12SQ series designed for recessing in virtually any type of ceiling. Standard with flat prismatic tempered glass lens that presents a clean appearance. Door Frame available in white (standard) or custom color. Ballast/Driver is fully serviceable from the ceiling aperture. 27" Bar hangers are standard. Optional "T" bar clips. Optional tamperproof hardware. A 24W LED is comparable to 70-100W HID. A 48W LED is comparable to 150-175W HID.

**HOUSING**

Steel housing with aluminum trim.

**LED COLOR**

Standard in 3000K. Consult factory for other Kelvin temperatures.

**ELECTRICAL**

High efficiency electronic constant current Class II 120/277V driver.

**SHIELDINGS**

Flat prismatic tempered glass lens is standard. Optional drop prismatic tempered glass, frosted glass and clear glass lens available. Consult factory of other lens options.

**FINISH**

Door frame is standard in white. Optional custom color door frame.

**CERTIFICATION**

All units bear UL label. UL Listed for Damp Location. Optional UL Wet Location label. ARRA & BAA Compliant. 3 year warranty.

**MODEL**  
12SQLED

**WATTAGE**  
24  
48

**VOLTAGE**  
UNV (120/277)

**OPTIONS:**

- EM** - Emergency
- WL** - UL Wet Location Label
- TBC** - T-bar clips (for grid ceilings)
- TP** - Tamperproof Hardware
- FGL** - Flat Frosted Glass Lens
- CGL** - Flat Clear Glass Lens
- DPG** - Drop Prismatic Glass Lens
- CC** - Custom Color Door Frame (specify color)



JOB NAME:
FIXTURE TYPE:
MODEL NO: