


NOW AVAILABLE IN LED!

DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

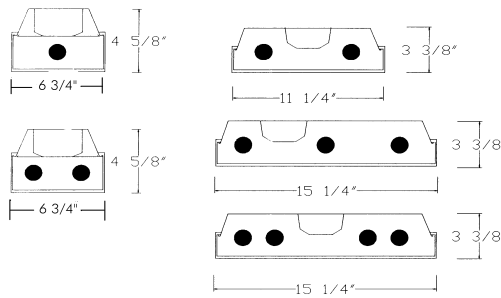

ORDERING

Available in 4 sizes to suit most commercial, classroom, and residential applications. Narrow 6-1/2" wide unit is available in 2', 4', and 8' lengths. 1 and 2 lamp, T8,T5 and LED. 11-1/4" wide unit is available in 2', 4' and 8' lengths, in a two-lamp configuration, T8 and T5. 15-1/4" wide unit is available in 2', 4', and 8' lengths, 2, 3, and 4 lamp configurations, T8,T5 and LED. Integral embossed white end plates with flush knockouts make fixtures suitable for individual or continuous row mounting. Diffuser hinges from either side for ease of service. Flat bottom and linear ribbed sides provide excellent light control. For surface or pendant mounting. Available with energy efficient reflectors in High Efficiency Aluminum (95% reflectance), Specular Aluminum (87% reflective) and High Efficiency White (92% reflectance.)

HOUSING

Die formed heavy guage steel with leveling embossments, which allow direct mounting on most combustibile low density ceilings. NYC approved 20 gauge steel available.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

100% clear acrylic prismatic diffuser is standard.

FINISH

All parts finished with high gloss baked white enamel with 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Suitable For damp location. Made in U.S.A. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>	
67	2' unit	2 17T8	120	
		3 14T5	277	
		4 24T5HO 8W LED	UNV	
	4' unit	2 32T8		
		3 28T5		
		4 54T5HO 18W&23W LED		
	8' unit	2 32T8-8TD		
		3 28T5-8TD		
		4 54T5HO-8TD 18W&23W		
	67N- (Narrow Width)	2' unit	1 17T8	
			2 14T5	
			24T5HO 8W LED	
4' unit		1 32T8		
		2 28T5		
		54T5HO 18W&23W LED		
8' unit		1 32T8-8TD		
		28T5-8TD		
		54T5HO-8TD 18W&23W LED		

OPTIONS:
EM -Emergency
DM - Dimming
 (Specify Type)
SA95- High Efficiency Aluminum Reflector
SA87- Specular Aluminum Reflector
WH92 -High Efficiency White Reflector
20G- 20 Gauge Steel
FRC- Full Reflector Cover (3 lamp versions required for pendant mounting.)
OC-Occupancy Sensor



JOB NAME:
FIXTURE TYPE: D
MODEL NO: