


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

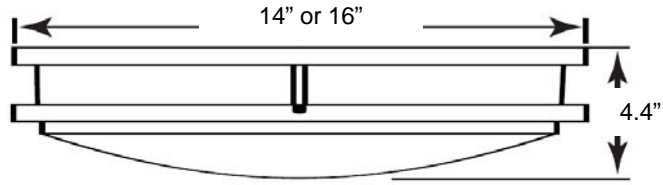

ORDERING

Opal diffuser envelops fixture housing in a smooth architectural line with accent on simplicity of design. Two different sizes (14" and 16") Designed for ceiling or wall surface mounting. Available in optional white powder coat finish. A 12W LED is comparable to 50W HID. A 24W LED is comparable to 70-100W HID.

HOUSING

Die formed heavy gauge steel housing.

ELECTRICAL

High efficiency electronic constant current Class II 120/277V driver.

LED COLOR

Standard in 5000K. Consult factory for other Kelvin temperatures.

SHIELDINGS

Soft white acrylic diffuser.

FINISH

Satin nickel finish is standard. Optional white powder coat finish available.

CERTIFICATION

Suitable for damp location. Made in USA. BAA and ARRA compliant. UL listed. 3 year warranty.

MODEL

ACULED14
14" diameter

WATTAGE

12W

VOLTAGE

UNV (120/277)

ACULED16

16" diameter

24W

OPTIONS

- EM** – Emergency
- WH** – White Finish



JOB NAME:
FIXTURE TYPE:
MODEL NO: