



## 6. Linear & Architectural

## 1.5" x 9" Pendant Luminaire

# A159

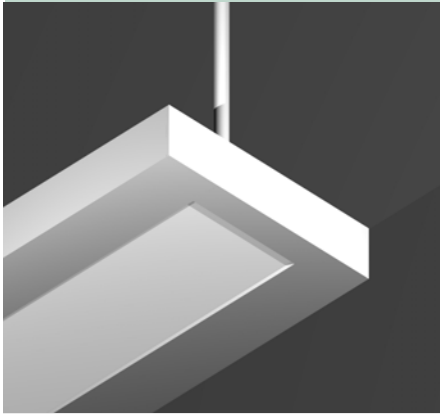

### DIMENSIONS

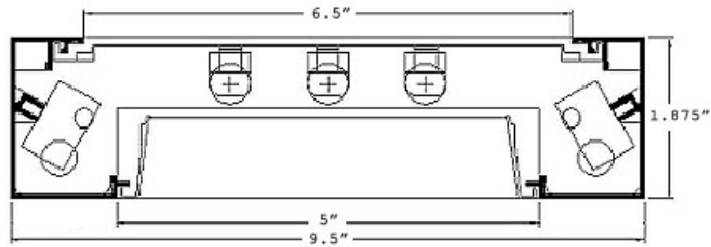

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



### ORDERING

Available in nominal lengths up to 8'-0" sections. Custom lengths are available upon request. Sleek rectangular shape fits well into modern architectural schemes. Standard color is white. This fixture is well balanced and is easy to install using either stems or adjustable aircraft cable. Wall mounting is also available. Standard light distribution is diffused direct/indirect. We offer various options including perforated or open center section with inlays.

#### HOUSING

Die formed heavy gauge steel housing.

#### ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

#### FINISH

All housings are post-painted with a white polyester powder coat with smooth finish. Textured finishes are available upon request.

#### CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
A159	1	48"	T5	AC – Aircraft	120
	2		T5HO	Cable (48" Standard)	277 UNV
	2	96"		ST – Stem	
	4	XX – Custom Length		(24" Standard)	

#### OPTIONS:

**EM** - Emergency  
**DM** - Dimming (Specify)  
**CC** - Custom Color

#### SHIELDING:

**PF** – Perforated Shielding  
**SO** – Solid Bottom, no direct light  
**WCB** – White Cross Baffle  
**ACR**– Acrylic Prismatic Lens



JOB NAME:
FIXTURE TYPE:
MODEL NO: