



Available in nominal lengths up to 8'-0" sections. Custom lengths are available upon request. Sleek rectangular shape fits well into modern architectural schemes. Standard color is white. This fixture is well balanced and is easy to install using either stems or adjustable aircraft cable. Light distribution is 70% indirect in lensed configuration. We offer various shielding options for the direct lighting component.

HOUSING

Die formed heavy gauge steel housing.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All housings are post-painted with a white polyester powder coat with smooth finish. Custom colors/finishes are available upon request.

SHIELDING


Center cut-out with prismatic inlay is standard.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

DIMENSIONS

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

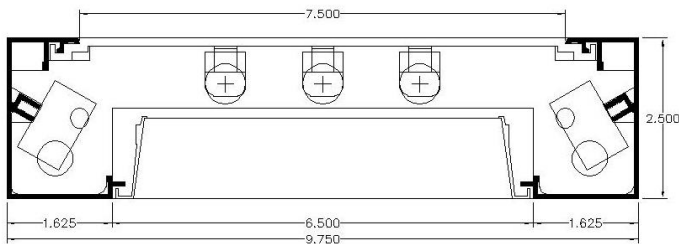

ORDERING

MODEL	LAMP QTY	LENGTH	TYPE	MOUNTING	VOLTAGE
A259	1	48"	LED Tube 18W	AC – Aircraft Cable (48" Standard)	UNV
	2		T8		120
	3		T5		277
	2	96"	T5HO	ST – Stem (24" Standard)	
	4	XX –			
	6	Custom Length			

OPTIONS:

- EM - Emergency
- DM – Dimming (Specify Type)
- CC - Custom Color
- ALUM – Aluminum Housing

SHIELDING:

- Direct Configuration**
- PB – Parabolic Louver, semi-specular finish
 - WCB – White Cross Baffle
 - SO – Solid Bottom, no direct light
 - PF – Perforated Bottom
 - OA – Opal Acrylic Inlay Bottom
- Indirect Configuration**
- SO – Solid Top, No indirect light
 - OP – Open Top



JOB NAME:
FIXTURE TYPE:
MODEL NO: