


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

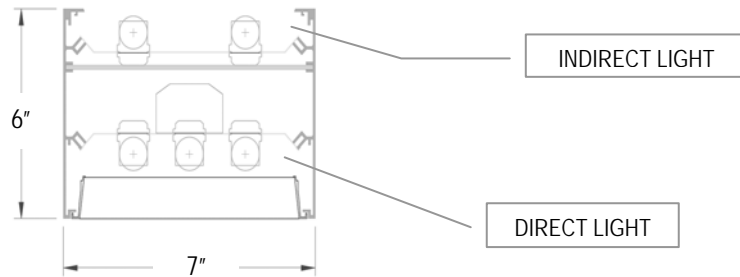

**ORDERING**

Available in nominal lengths up to 8'-0" sections, T5 or T8 operation, custom lengths available upon request. For continuous runs please consult factory with specific wiring instructions. Simple clean linear lines allow for this fixture to blend aesthetically into almost any space. Mounting can be accomplished using adjustable aircraft cables or rigid stems. Wall mount is also available.

**HOUSING**

Housing constructed of extruded aluminum.

**ELECTRICAL**

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

**DIFFUSERS**

Pattern A12 acrylic lens is standard. Optional white cross blade and parabolic louver. When using parabolic aluminum louver, low iridescent finish is standard.

**FINISH**

All parts finished with white polyester powder coat with minimum 89% reflectivity. Standard color is white. Other colors are available upon request.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>INDIRECT LAMP QTY</u>	<u>DIRECT LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>VOLTAGE</u>
A67	0	0	48"	T8	120
	1	1		T5	277
	2	2		T5HO	UNV
	3	3			
	0	0	96"		
	2	2			
	4	4			
	6	6			
			XX – Custom Length		

**SHIELDING:**

**Indirect Configuration (Uplight)**

- SO – Solid Top, No Indirect Light
- OP – Open Top
- AL – Acrylic Lens, Ribbed

**Direct Configuration (Downlight)**

- WCB – White Cross Blade
- AL – Acrylic Lens, Ribbed
- SO – Solid Bottom, No Direct Light
- PB – Parabolic Louver

**OPTIONS:**

- EM - Emergency
- DM - Dimming
- CC - Custom Color
- AC – Aircraft Cable (48" Standard)
- ST – Stem (24" Standard)
- WM – Wall Mount
- S – Surface



JOB NAME:
FIXTURE TYPE:
MODEL NO: