



6. Linear & Architectural

8" x 7.5" Linear Pendant Luminaire

A875

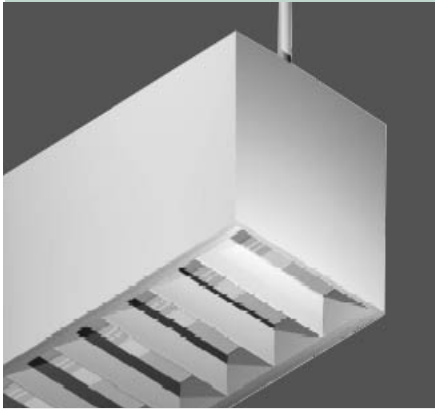

DIMENSIONS

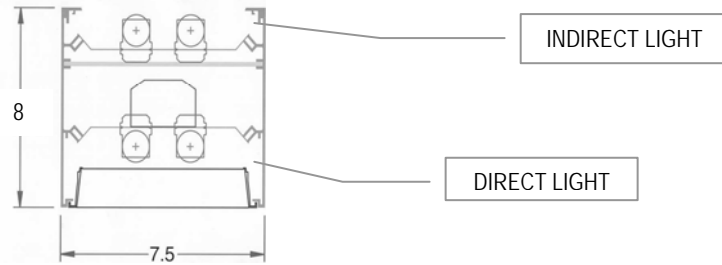

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in nominal lengths up to 8'-0" sections, T5 or T8 operation, custom lengths available upon request. For continuous runs please consult factory with specific wiring instructions. Extruded aluminum housing with options of cross baffle, lens or parabolic louver shielding. Simple clean linear lines allow for this fixture to blend aesthetically into almost any space. Mounting can be accomplished using adjustable aircraft cables or rigid stem. Wall mount is also optional.

HOUSING

Housing constructed of extruded aluminum.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

DIFFUSERS

White cross baffle optional.

FINISH

All parts finished with white polyester with minimum 89% reflectivity. Standard color is white. Other colors are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>INDIRECT LAMP QTY</u>	<u>DIRECT LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>VOLTAGE</u>
A875	0	0	48"	T8	120
	1	1		T5	277
	2	2		T5HO	UNV
	3	3			
	0	0	96"		
	2	2			
	4	4			
	6	6			

XX – Custom Length

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- CC** - Custom Color
- AC** - Aircraft Cable (48" Standard)
- ST** - Stem (24" Standard)
- WM** - Wall Mounted
- S** - Surface (Direct Only)

SHIELDING:

- Indirect Configuration (Uplight)**
- SO** - Solid Top, No Indirect Light
 - OP** - Open Top
 - AL** - Acrylic Lens, Ribbed
- Direct Configuration (Downlight)**
- WCB** - White Cross Blade
 - AL** - Acrylic Lens, Ribbed
 - SO** - Solid Bottom, No Direct Light
 - PB** - Parabolic Louver



JOB NAME:
FIXTURE TYPE:
MODEL NO: