


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

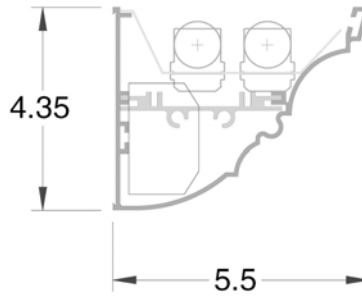

ORDERING

Available in nominal lengths up to 8'-0" sections or continuous rows, T-5 or T-8 operation. Glare-free indirect illumination is ideal for hallways and small offices. Traditional perimeter cove fixture resembles decorative crown molding. Inside and outside 90 degree turns are available creating smooth transitions at corners. Eliminates the cost and construction associated with conventional drywall cove systems. Dimming is available as an option.

HOUSING

Housing constructed of durable extruded aluminum. Welded aluminum decorative end caps at ends of rows.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

Housings and ends are post-painted white as standard with smooth polyester powder coat. All custom colors and textures are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
ACV	1	48"	T8	WM – Wall Mounted	120
	2		T5		277
	2	96"	T5HO		UNV
	4		XX – Custom Length		

OPTIONS:

- EM - Emergency
- DM - Dimming
- CC - Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: