


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

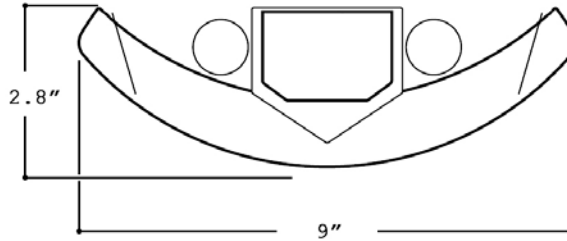

**ORDERING**

Simple and efficient, fixture is available in T5 and T5HO operation with two lamps in cross section. Unique and elegant elliptical design is under 3" in profile. Fixture may be supplied in nominal lengths up to 8' - 0" sections. Can be surface mounted with closed top for 100% direct distribution or stem or cable mounted for 40% direct 60% indirect distribution.

**HOUSING**

Housing and ends constructed of durable, lightweight extruded aluminum.

**ELECTRICAL**

All T5 and T5HO units come with instant start high frequency electronic ballasts with less than 10% THD.

**SHIELDING**

Die formed all aluminum baffle assembly with optional perforated side rails..

**FINISH**

Housings are post-painted with white polyester powdercoat as standard. All other colors available upon request.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
ELIP2	2	48"	T5 T5HO	AC – Aircraft Cable (48" Standard)	120 277 UNV
	4	96"	XX – Custom Length	ST – Stem (24" Standard) SM – Surface Mount (Direct Only)	

**OPTIONS**

- EM - Emergency
- DM - Dimming
- CC - Custom Color
- PSR – Perforated Side Rails



JOB NAME:
FIXTURE TYPE:
MODEL NO: