


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

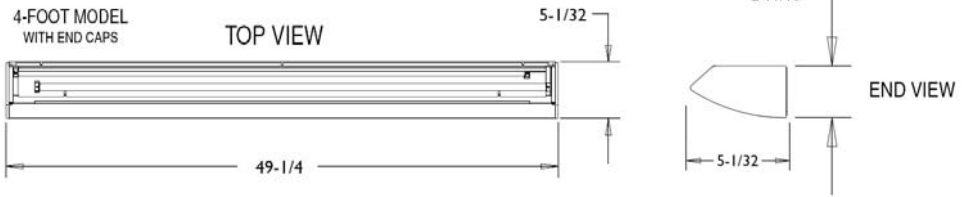

**ORDERING**

Wall mount unit is available in nominal 4', and 8' lengths to accommodate 2 lamp T5 or T5-HO lamps. Roll formed housing is standard with the perforated housing for 80% indirect and 20% direct. Optional with open slot for opal acrylic lens for 60% indirect and 40% direct and solid housing for 100% indirect illumination. The versatile design of this fixture makes it ideal for commercial and educational settings. Individual fixtures are standard. For continuous row applications, row lengths must be specified. Matching ceiling mount fixture available.

**HOUSING**

Housing constructed of heavy gauge steel.

**ELECTRICAL**

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

**FINISH**

All parts finished with white polyester powder coat, smooth finish. Custom colors and textures are available.

**CERTIFICATION**

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
IDTWM	2	48"	T8	AC – Aircraft	120
	4	96"	T5	Cable (48" Standard)	277
				ST – Stem (24" Standard)	UNV
				CH – Chain Mounting	

**OPTIONS:**

- EM** – Emergency
- DM** – Dimming
- CC** – Custom Color
- INT** – Intermediate Section of Fixture Run
- BOR** – Beginning of Fixture Run
- EOR** – End of Fixture Run
- RS** – Program Rapid Start Ballast
- SO** – Solid Housing for 100% Indirect
- OP** – Open Slot Fixture with Acrylic Lens



JOB NAME:
FIXTURE TYPE:
MODEL NO: