


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

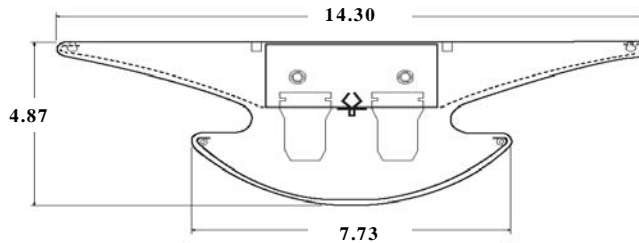

ORDERING

Available in T8 and T5 lamping. Contemporary, low profile luminaire designed for surface or suspended mounting. Ideal for use in classrooms, conference room, reception areas, anywhere surface mounting is preferred and indirect illumination is desired. Highly reflective matte white finish provides soft, uniform indirect illumination. Round hole perforated center basket with reflective white acrylic diffuser controls glare and veiling reflection. Fixture is also available with fluted or smooth lens for added direct illumination.

HOUSING

Die formed heavy gauge steel unitized into one piece.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Perforated diffusing element with matte white acrylic overlay or lensing as desired.

FINISH

All metal parts pretreated with a phosphate bonding process and finished with an electrostatically applied high temperature white baked matte enamel for superior reflectance and durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
MCG	1	48"	T8	AC – Aircraft Cable (48" Standard)	120
	2		T5	ST – Stem (24" Standard)	277
				SF – Surface Mount	UNV


OPTIONS:

- EM - Emergency
- DM - Dimming (Specify Type)
- CC - Custom Color

Shielding

Direct Configuration

- PF – Perforated Basket
- AL – Acrylic Lens, Ribbed
- OL – Opal White Lens

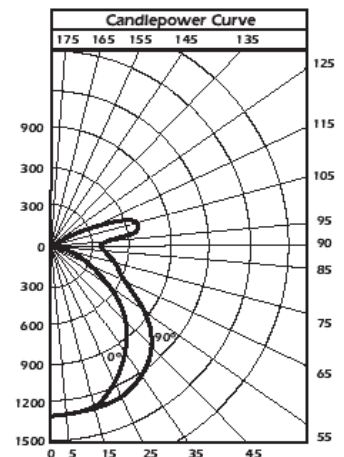

MCG-232T8-AL



JOB NAME:
FIXTURE TYPE:
MODEL NO: