




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

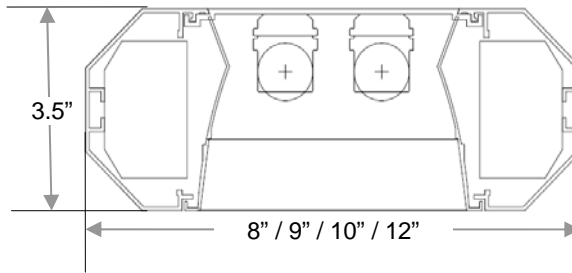

ORDERING

Available in normal lengths up to 8'-0" sections, T5, T5-HO, T8 or T12 operation. Extruded aluminum housing with option of either cross baffle, parabolic louver or acrylic lens. The versatile design of this fixture makes it ideal for typical commercial and educational settings. Fixture available in straight run or square patterns. Individual fixtures are standard. For continuous row applications; row lengths must be specified. Cross, T's and angle connectors are constructed of heavy gauge metal castings. Fixture can be surface or pendant mounted with cables or stems. Companion wall mounted unit is available.

HOUSING

Housing constructed of durable extruded aluminum. End caps are made of die cast aluminum.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All parts finished with white polyester powder coat, smooth finish. Custom colors and textures are available.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

| <u>MODEL</u> | <u>LAMP QTY</u> | <u>LENGTH</u> | <u>TYPE</u> | <u>MOUNTING</u> | <u>VOLTAGE</u> |
|---------------------------|-----------------|---------------|---------------------------------|---|----------------|
| 8OCT – 8" width | 1 | 48" | T8 | AC – Aircraft Cable (48" Standard) ST – Stem (24" Standard) SM – Surface Mount | 120 |
| | 2 | | T5 | | 277 |
| | 4 | 96" | T5HO | | UNV |
| | 2 | | | | |
| 9OCT 9" width | 1 | 48" | | | |
| | 2 | | | | |
| | 3 | | | | |
| 10OCT 10" width | 2 | 96" | | | |
| | 4 | | | | |
| | 6 | | | | |
| 12OCT 12" width | 1 | 48" | | | |
| | 2 | | | | |
| | 3 | | | | |
| | 4 | | | | |
| | 2 | 96" | | | |
| | 4 | | | | |
| | 6 | | | | |
| | 8 | | | | |
| | | | XX – Custom Length | | |

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- CC** - Custom Color

Shielding

Direct Configuration

- PB** – Parabolic Louver, Semi-Specular Finish
- PS** – Parabolic Specular Louver, Specular Finish
- BL** – Cross Blade, White Finish
- AL** – Acrylic Lens, Ribbed
- SO** – Solid Bottom, No Direct Light

Indirect Configuration

- SO** – Solid Top, No Indirect Lighting
- AL** – Acrylic Lens, Ribbed
- OP** – Open Top
- DC** – Dust Cover



| |
|---------------|
| JOB NAME: |
| FIXTURE TYPE: |
| MODEL NO: |