




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

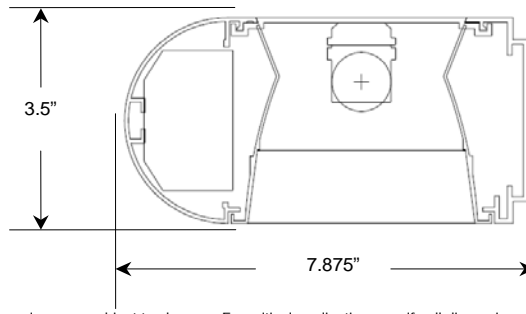

ORDERING

Readily available in nominal lengths up to 8'-0" sections or in continuous rows, T5 or T8 operation. Durable extruded housing may be painted any color upon request. White is standard. Glare-free direct/indirect illuminations ideal for hallways and small offices. 90 degree turns are available so there are no awkward aesthetic gaps on the wall. Optional clear dust cover keeps lamps clean, thereby improving maintained performance. This wall mount fixture compliments our OVL pendant luminaire. Compliments pendant mounted OVL Luminaire.

HOUSING

Housing constructed of durable, light-weight extruded aluminum. Endcaps are made of die cast aluminum for rigidity.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

A wide variety of lamp shielding is available. You may request parabolic louvers or cross blades with any finish or acrylic lenses of any distribution pattern.

FINISH

Housings are post-painted in white as standard, with smooth polyester powder coat. Custom colors and textures are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
OVLWM	1	48"	T8	WM – Wall Mounted	120
	2		T5		277
	2	96"	T5HO		UNV
	4				
			XX – Custom Length		

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- CC** - Custom Color

Shielding

Direct Configuration

- PB** – Parabolic Louver, Semi-Specular Finish
- PS** – Parabolic Specular Louver, Specular Finish
- BL** – Cross Blade, White Finish
- AL** – Acrylic Lens, Ribbed
- SO** – Solid Bottom, No Direct Light

Indirect Configuration

- SO** – Solid Top, No Indirect Light
- OP** – Open Top
- AL** – Acrylic Lens, Ribbed
- DC** – Dust Cover, Clear Acrylic



JOB NAME:
FIXTURE TYPE:
MODEL NO: