


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

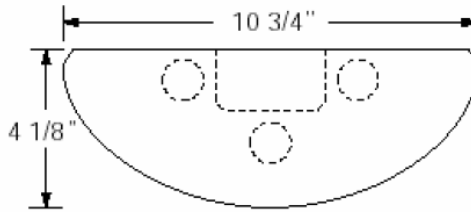

ORDERING

Ideal for offices, conference rooms, reception areas, classrooms. Any installation where linear luminaires are preferred. A low-profile suspended direct/indirect luminaire provides attractive glare-free ambient lighting. Available in 1, 2, and 3 light configurations, in T8, T5 and T5HO. Continuous rows achieved with joiner assemblies. Micro-perforated body in conjunction with opal acrylic inlay provide soft, glare free direct light with even ceiling illumination. Fixtures can be cable or rigid stem mounted. Available with fully perforated basket or with optional side perforations with solid center panel.

HOUSING

Die-formed heavy gauge cold rolled steel. End caps are molded white plastic.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Micro-perforated baffle constructed of heavy gauge steel with 5/64" diameter perforations staggered at 7/64" intervals.

FINISH

Phosphate coated baked white enamel with 87% reflectivity.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
PERF	1	48"	T8	AC – Aircraft	120
	2		T5	Cable (48"	277
	3		T5HO	Standard)	UNV
	2	96"		ST – Stem	
	4			(24" Standard)	
	6				

XX – Custom Length

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- CC** - Custom Color

Shielding

- Direct Configuration**
- PF** – Full Perforated Basket
- SC** – Perforated Sides, Solid Bottom

- Indirect Configuration**
- OP** – Open Top



JOB NAME:
FIXTURE TYPE:
MODEL NO: