


6. Linear & Architectural

Round Luminaire

RND



DIMENSIONS

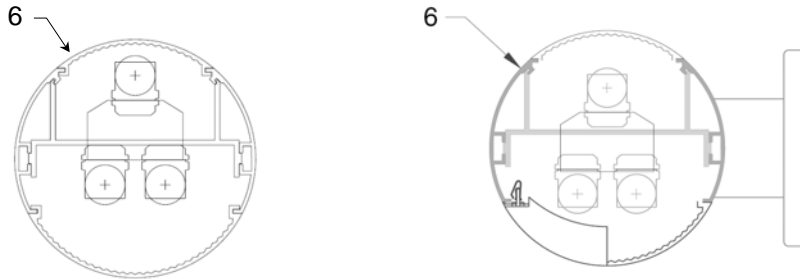

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in nominal lengths up to 8'-0" sections, T5 or T8 lamping, 3.5", 4", 6", 7", and 9" diameters. Fixture is available in straight runs or square patterns. Individual fixtures are standard. For continuous row installations, row lengths must be specified.

HOUSING

Housing constructed of durable extruded aluminum. Die cast aluminum end plates and center couplings provided as required.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Users have the choice of cross baffles and lenses. Choice of multiple lens and baffle styles available. Direct unit is standard. Unit is also available in direct/indirect, direct only or indirect only versions.

MOUNTING

Fixture can be surface mounted or pendant mounted using cables or stems. Companion adjustable wall mounted fixtures are also available.

FINISH

All housings post-painted with a smooth white polyester powder coat. Textured finishes and other colors are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA and BAA compliant. Wet location available upon request (consult factory).

<u>MODEL</u>	<u>DIRECT LAMP QTY</u>	<u>INDIRECT LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
3.5RND	0 or 1	0 or 1	48"	T8	AC – Aircraft Cable (48" Standard)	120
	2 or 4	2 or 4	96"	T5 T5HO	ST – Stem (24" Standard) WM – Wall Mounted AWM – Adjustable Wall Mount (only 4', 6', 9')	277 UNV
4RND	0, 1 or 2	0, 1 or 2	48"			
	0, 2 or 4	0, 2 or 4	96"			
6RND	0, 1 or 2	0, 1 or 2	48"			
	0, 2 or 4	0, 2 or 4	96"			
7RND	0, 1, 2 or 3	0, 1, 2 or 3	48"			
	0, 2, 4 or 6	0, 2, 4 or 6	96"			
9RND	0, 1, 2 or 3	0, 1, 2 or 3	48"			
	0, 2, 4 or 6	0, 2, 4 or 6	96"			

OPTIONS:

EM - Emergency
DM - Dimming
CC - Custom Color(Specify)
WL - Wet Location (Lens Only)
2CKT - Dual Level Switching

Shielding

Indirect Configuration
SO – Solid Top, No Indirect Light
OP – Open Top
AL – Acrylic Lens, Ribbed

Direct Configuration
BL – Radial Cross Blade, White Finish
AL – Acrylic Lens, Ribbed
SO – Solid Bottom, No Direct Light

JOB NAME:

FIXTURE TYPE:

MODEL NO:

