




DIMENSIONS

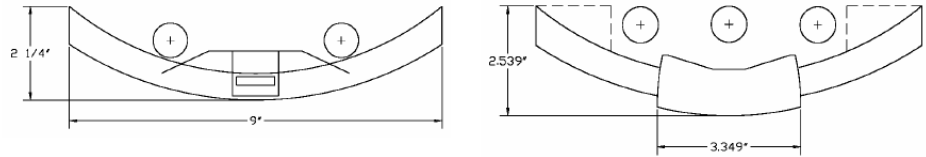

Shown with optional louver

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

An ultra low-profile linear luminaire suspended direct/indirect provides attractive glare-free ambient lighting. Available for T5 and T5-HO in 2, 3, 4 & 6 lamp configurations in lengths up to 8 foot. Optional center baffle provides 30% direct and 70% indirect illumination with even ceiling illumination. Radial extruded acrylic center lens for 20% direct and 80% indirect available. Ideal for offices, conference rooms, reception areas, classrooms, video display terminal work areas, or any installation where linear luminaires are preferred. Fixtures can be cable or rigid stem mounted. Companion wall mount fixture available

HOUSING

Housing constructed of durable extruded aluminum.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

FINISH

All housings post-painted with a smooth white polyester powder coat. Textured finishes and other colors are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>
SCOOP	2	48"	T5	AC – Aircraft	120
	3		T5HO	Cable (48" Standard)	277 UNV
	4	96"		ST – Stem	
	6			(24" Standard)	
			XX – Custom Length		

OPTIONS:

- EM - Emergency
- DM - Dimming
- CC - Custom Color
- ACR – Acrylic Center Lens
- PBL – Parabolic Louver
- WRB – White Radial Baffle
- RS – Program Rapid Start



JOB NAME:
FIXTURE TYPE:
MODEL NO: