




DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

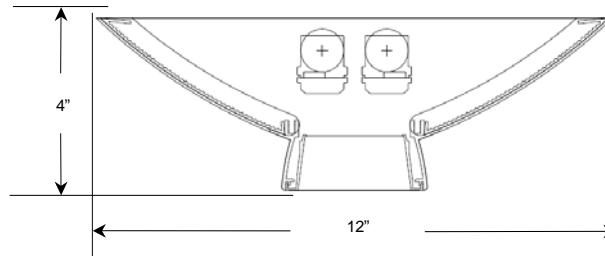

ORDERING

Available in nominal lengths up to 96" with T5 and T8 lamping. Ideal for classrooms, offices, any space with computer/VDT use. This versatile luminaire offers a wide selection of indirect and direct lighting combinations, effectively illuminating any space. Three lamp units are available with dual-switching to allow full control of light levels, dimming is also an option. Companion wall mount fixture available.

HOUSING

Housing constructed of durable extruded aluminum. Endcaps are made of die cast aluminum for rigidity.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Acrylic Lens is standard for the direct lighting lamp component, side perforation with open top is standard for the indirect lighting components.

FINISH

Housings are post-painted with white polyester powder coat as standard. All other colors available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>MOUNTING</u>	<u>VOLTAGE</u>	<u>OPTIONS</u>
SDK	2	48"	T8	AC – Aircraft	120	EM -
	3	96"	T5	Cable (48" Standard)	277	Emergency
			T5HO	ST – Stem (24" Standard)	UNV	DM - Dimming
						CC - Custom Color

ADDITIONAL OPTIONS:

Shielding

Direct Configuration

- PB** – Parabolic Louver, semi-specular finish
- WCB** – White Cross Baffle.
- SO** – Solid Bottom, No direct light

Indirect Configuration

- PS** – Perforated Side Panels
- SO** – Solid Side Panels, no direct light



JOB NAME:
FIXTURE TYPE:
MODEL NO: