



6. Linear & Architectural

SDK Wall Mounted Luminaire

SDKWM

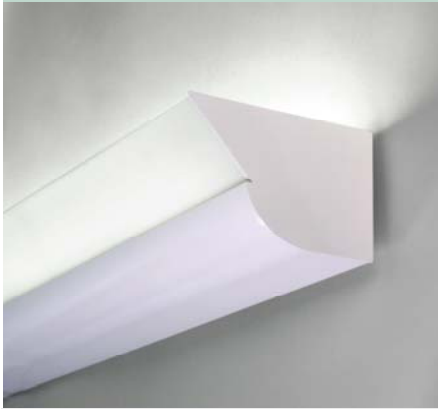

DIMENSIONS

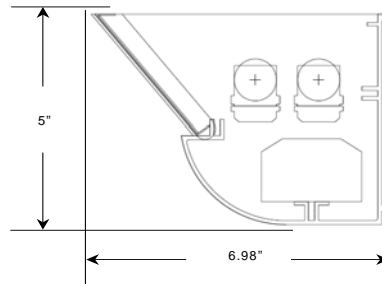

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Available in nominal lengths up to 8'-0" sections or continuous rows, T-5 or T-8 operation. Glare-free indirect illumination is ideal for hallways and small offices. Modern appearance; side perforation glows providing accent to any architectural scheme. Compliments our pendant mounted SDK luminaire.

HOUSING

Housing constructed of durable extruded aluminum. Endcaps are made of die cast aluminum for rigidity.

ELECTRICAL

Energy saving electronic ballasts comply with Federal Energy Efficiency standards. Ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120V-277V (UNV) unless specified otherwise.

SHIELDING

Side perforation is standard with opal inlay. Solid side panels are also available for 100% indirect lighting

FINISH

Housings and perforations are post-painted with white as standard with smooth polyester powder coat. All custom colors and textures are available upon request.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

MODEL
SDKWM

LAMP QTY
1
2

LENGTH
48"
96"
XX –
Custom
Length

TYPE
T8
T5

VOLTAGE
120
277
UNV

OPTIONS:

- EM** - Emergency
- DM** - Dimming
- CC** - Custom Color
- SO** - Solid Side Panel



JOB NAME:

FIXTURE TYPE:

MODEL NO: