



6. Linear & Architectural

Surface/Wall Luminaire

SW66

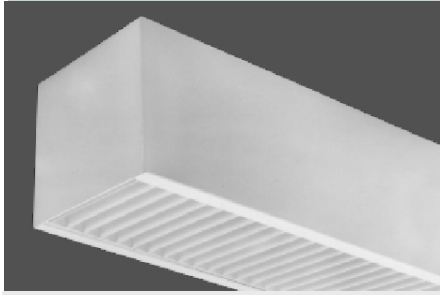

DIMENSIONS

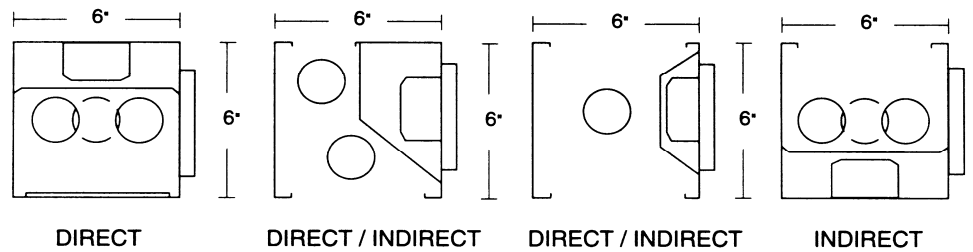

(Shown with optional wall mount brackets)

Dimensions are subject to change. For critical applications, verify all dimensions with factory.




ORDERING

<u>MODEL</u>	<u>LAMP QTY</u>	<u>LENGTH</u>	<u>TYPE</u>	<u>VOLTAGE</u>
SW66	1	24"	T8	120
	2	36"	T5	277
	3	48"	T5HO	UNV
	4	96"		


OPTIONS:

- WBC** – White Cross Baffle
- ASY** – Asymmetrical Distribution
- .125A** – 125" Thick Acrylic Lens
- OPL** – White Opal Lens
- PBL** – Parabolic (Semi-Specular) Cross Baffle
- EM** – Emergency Battery Back Up
- AH** – Aluminum Housing (Consult Factory)
- CC** – Custom Color
- IND** – Indirect
- D/I** – Direct/Indirect
- SA85** – Specular Aluminum Reflector


WALL DIRECT



WALL DIRECT-INDIRECT



WALL INDIRECT



Available in 2', 3', 4', 6' and 8' lengths, 1 and 2 lamp configurations, T8 and T5. Wall mount brackets included for 1" spacing. (Two are required for 2', 3', and 4'. Three are required for 6' and 8'.) 6x6 narrow design is architecturally preferred for installation in corridors, lobbies, and office areas. For individual or continuous row mounting. Direct downlight is standard. Indirect and direct/indirect applications are available. Ends seams are fitted to provide the appearance of continuous row mounting. Knockouts on channel ends allow for through wiring or end feed. For full complement of accessories to ease installation, refer to **Options** section. Custom colors available to match any décor. Available with energy efficient reflectors in high efficiency specular aluminum (95% reflectance) or specular aluminum (85% reflectance).

HOUSING

Die formed and welded heavy gauge cold rolled steel.

ELECTRICAL

Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.

SHIELDING

Acrylic prismatic is standard. Optional white cross baffle and semi-specular cross baffle. Refer to **Options** for additional shielding.

FINISH

All metal parts post painted with premium grade white enamel with a minimum 89% reflectance applied over iron phosphate pretreatment for maximum adhesion and rust resistance.

CERTIFICATION

All units bear UL label. Made in U.S.A. Suitable for damp location. ARRA and BAA compliant.

JOB NAME:

FIXTURE TYPE:

MODEL NO:

