


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

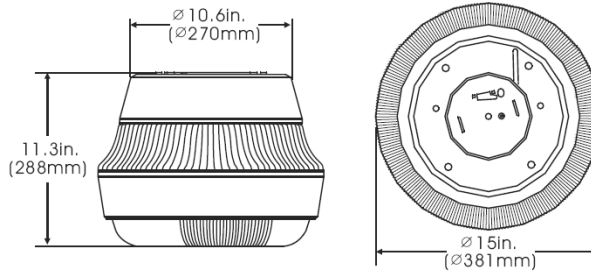

ORDERING

Available in

- 70W-150W Pulse Start Metal Halide
- 2 or 4 light Compact Fluorescent (26W, 32W, or 42W)

Ideal for parking areas, entrances, walkways, underpasses, loading docks, and on building exteriors. Anodized aluminum reflector offers high reflectivity and ease of maintenance. Consult factory for induction.

HOUSING

Heavy duty die-cast aluminum housing.

ELECTRICAL

High Power Factor, constant wattage autotransformer available in fixed voltage or multi-tap.

REFLECTOR

One piece anodized aluminum designed reflector for best light efficiency.

CERTIFICATION

All units bear UL label. Made in U.S.A. UL listed for wet location, covered ceiling mount only.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
GL2	1	70	PSMH- Pulse Start Metal Halide	120
		100		480
		150		MULTI
	2	26	CF- Compact Fluorescent	120
	4	32		UNV
		42		

ADDITIONAL OPTIONS:

- PC** – Photocell
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- HS** – 180° Cutoff Shield



JOB NAME:
FIXTURE TYPE:
MODEL NO:

