


4. Outdoor Cut-Off Cast Aluminum Exterior Wall Bracket

CWP

DIMENSIONS

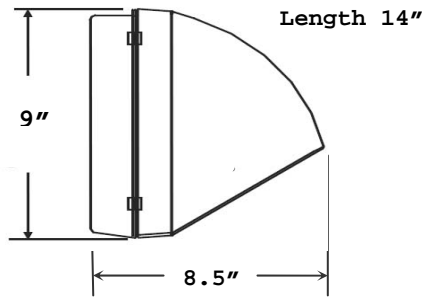

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

Die cast aluminum housing with integral hinging feature for ease of maintenance. Available in high-pressure sodium 70W-150W and pulse start metal halide 70W-150W. Heat and impact resistant tempered glass is standard. Dark sky friendly lighting aims light 15° below the horizontal. Hydroformed aluminum reflector improves fixture performance. All units are provided with 1/2" threaded apertures allowing for surface conduit installation and/or optional photocell. All units fully gasketed for weather tight construction. All units may mount directly over standard 4" outlet boxes or with surface conduit.

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

For metal halide lamping, ballast is high power factor, constant wattage auto transformer. Electrical components are mounted to cast aluminum housing for optimum heat dissipation. For high pressure sodium, ballast is normal power factor reactor type for 120V. High power factor, multi-tap, and most fixed voltages available.

SHIELDING

Clear tempered glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability.

CERTIFICATION

All units bear UL label. UL listed for wet and damp locations. Made in U.S.A.

MODEL CWP	WATTAGE	TYPE	VOLTAGE
	70	PSMH –	120
	100	Pulse Start	277
	150	Metal Halide	480
			MULTI
	100	HPS – High	
	150	Pressure	
		Sodium	
	70	IND –	
		Induction	
	26	CF –	UNV
	32	Compact	
	42	Fluorescent	
	2-26		
	2-32		
	2-42		

OPTIONS:

EM – 90 Minute Remote Battery Back-Up (For Compact Fluorescent Only)

PC – Photocell

TP – Tamperproof hardware

GLR – Fusing

QZ – Quartz Restrike

CC – Custom Color

JOB NAME:

FIXTURE TYPE:

MODEL NO:

