



NOW AVAILABLE IN LED!

Available in two sizes: 10" and 14". This fixture comes in Compact Fluorescent, HID, Induction and now in available in LED. Can be supplied with or without cast guard. Standard with frosted glass lens. Polycarbonate lenses available on 14" fixtures in three styles. Fully gasketed housing. For wall or ceiling mount.

HOUSING

Heavy gauge die cast aluminum.

GUARD

Specify open face, eyelid face, or cross grid guard. Guards are die cast aluminum, held with two standard screws. Optional tamperproof screws.

ELECTRICAL

Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards. Compact fluorescent ballasts are <10% THD and include 5 year manufacturer's warranty. Ballasts operate on 120-277V (UNV) unless otherwise specified.


FINISH

Specify white, black, bronze, or titanium polyester powder coat finish. Optional custom colors available.

CERTIFICATION

All units bear UL label and are assembled in U.S.A. ARRA compliant. Suitable for wet or damp locations.

DIMENSIONS

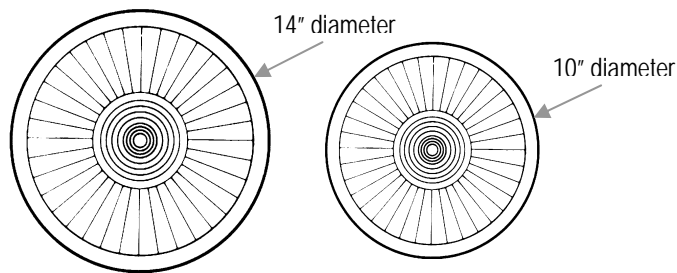

Dimensions are subject to change. For critical applications, verify all dimensions with factory.



ORDERING

MODEL	WATTAGE	TYPE	VOLTAGE	OPTIONS:
RCA - 10" diameter	PL9	CF- Compact	120V	EM - Emergency
	1-PL13 2-PL13 1-26	Fluorescent	277V UNV	Battery Pack
14RCA - 14" diameter	12W	LED - Light Emitting Diode		PC - Photocell (specify voltage)
	(1 or 2) 26W (1 or 2) 32W (1 or 2) 42W	CF- Compact Fluorescent		OF - Open Face
	50	PSMH- Pulse Start		EF - Eyelid Face
	70	Metal Halide		GD - Cast Cross Guard
	100			TP - Tamperproof Screws
	150	HPS- High Pressure Sodium		TSD - Tamperproof Screwdriver
	80	IND- Induction		POLY14WH - Opal Polycarbonate Lens (14" Only)
24	LED - Light Emitting Diode		CC - Custom Color	
48				



JOB NAME:
FIXTURE TYPE:
MODEL NO: