


**DIMENSIONS**



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

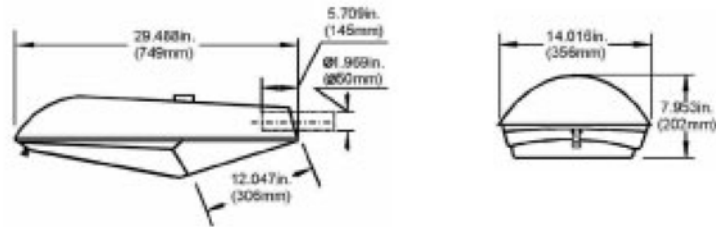

**ORDERING**

Available in High Pressure Sodium 250W-400W and Metal Halide 150W-400W max. Ideal for parking areas, roadway lighting, anywhere high efficiency flood lighting is required. Aluminum reflector is designed for maximum photometric efficiency and optimum light distribution. Optional tamperproof hardware is available. Photocell for dawn to dusk applications is also optional.

**HOUSING**

Die cast aluminum housing

**ELECTRICAL**

Normal Power Factor reactor type for High Pressure Sodium 120V only. Pulse Start Metal Halide dual voltage (120/277V) High Reactance High Power Factor.

**SHIELDING**

One piece high impact tempered clear glass lens is secured in a die cast aluminum doorframe.

**FINISH**

Powder coated in architectural bronze.

**CERTIFICATION**

All units bear UL labels. UL listed for wet and damp locations. Made in U.S.A.

<u>MODEL</u>	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
<b>RW400</b>	150	<b>PSMH</b> –	120
	250	Pulse Start	277
	400	Metal Halide	480
	250	<b>HPS</b> – High	MULTI
	350	Pressure	
	400	Sodium	

**OPTIONS**

- WM** – Wall Mount
- CPM** – Close to pole mount
- 6PM** – 6' extended pole mount
- SF** – Adjustable Slip Fitter
- WG** – Wire Guard
- LEX** – Polycarbonate Vandal Shield
- BLS** – Blacklight Shield
- PC** – Photocell
- QZ** – Quartz Restrike
- WA** – Wide Angle
- ASYM** – Asymmetric
- FWT** – Forward Throw



JOB NAME:
FIXTURE TYPE:
MODEL NO: