


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

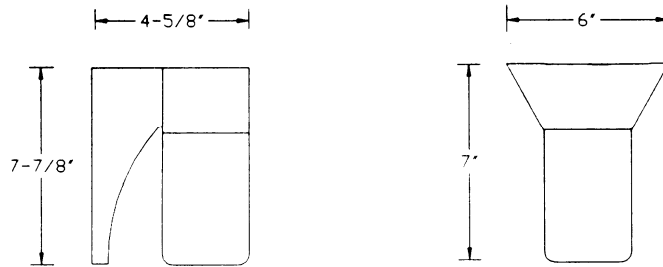

ORDERING

Designed to accommodate energy efficient compact fluorescent PL, incandescent, and HID. Ideal for parking areas, entrances and walkways, loading platforms, perimeter lighting, recreational facilities, and any other high abuse area. Compact design for excellent illumination in an unobtrusive housing. Choice of globe or cylinder styles to fill many lighting requirements. Durable die cast aluminum construction, capable of withstanding harsh environments. For direct mounting to flush or surface outlet box on wall or ceiling surfaces. Polycarbonate diffuser and wire guards are optional for applications where vandalism is a concern. Optional photocell available for automatic dusk to dawn lighting.

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>DIFFUSER</u>	<u>VOLTAGE</u>
WP	1 2	100A (MAX) PL7 PL9Q PL13	CYL- Cylinder GLO-Globe	120

HOUSING

Rugged die cast aluminum construction.

ELECTRICAL

Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards.

SHIELDING

Standard diffuser is threaded opal glass. Polycarbonate diffuser is standard for PL13 units, and optional for others.

FINISH


Durable satin brushed aluminum is standard.

CERTIFICATION

All units bear UL and Made in U.S.A. labels.

OPTIONS:

- PD – Polycarbonate Diffuser
- WG – Wire Guard (cylinder only)
- PC – Photocell (Voltage)

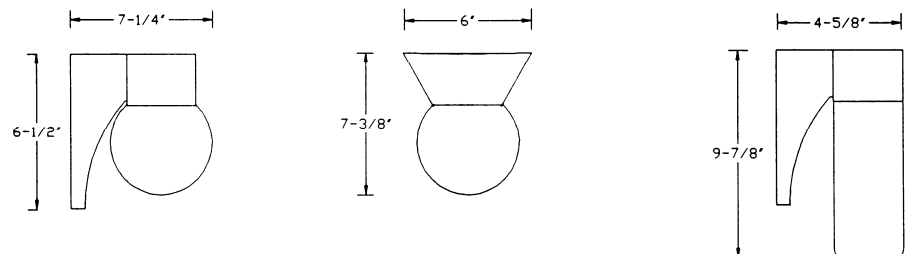

JOB NAME:
FIXTURE TYPE:
MODEL NO: