


DIMENSIONS

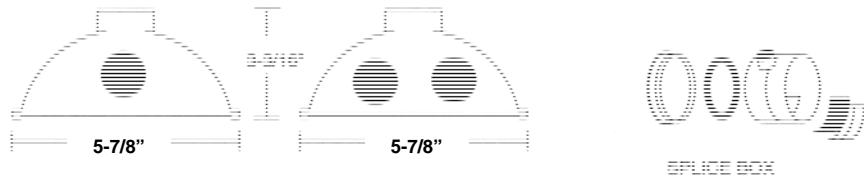

Dimensions are subject to change. For critical applications, verify all dimensions with factory.

Available in 4', 6', 8', 12' tandem and 16' tandem lengths. Extruded aluminum housing with integral enclosure and retaining grooves. Rugged cast aluminum end caps with integral hub to accommodate end splice box. Die cast aluminum end splice boxes tapped for 3/4" conduit. Removable die cast end caps allow for individual or continuous row mounting. Fixture can swivel 360° with splice box mounting. All weather lamp holders with integral gasket. Extruded clear acrylic enclosure.

HOUSING

Extruded aluminum for durable, weatherproof construction. Housing is high reflectivity powder coat white. Ends are cast aluminum finish.

ELECTRICAL

T8 and T12 units supplied Remote Mount Energy saving and electronic class P, HPF ballasts comply with Federal Energy Efficiency standards. Optional weatherproof ballast box. T5 and T5-HO supplied with integral ballast

SHIELDING

Clear extruded acrylic shield locks into full length groove. Stainless steel lens retaining brackets are easily removed for re-lamping.

CERTIFICATION

All units bear UL label for wet and damp locations. Made in U.S.A.

ORDERING

<u>MODEL</u>	<u>LAMP QTY</u>	<u>WATTAGE/TYPE</u>	<u>VOLTAGE</u>
OSL (4' unit)	1	32 T8 48 T12HO 48 T12VHO	120V 277V *UNV
	1 2	28 T5 54 T5HO	
(6' unit)	1	72 T12HO 72 T12VHO	
	1	96 T12HO 96 T12VHO	
(8' unit)	2 4	28 T5 54 T5HO-8TD	
	2	72 T12HO-12TD 72 T12VHO-12TD	
(12' unit)	2	96 T12HO-16TD 96 T12VHO-16TD	
(16' unit)	2		

OPTIONS:

- *UNV – Universal Voltage Ballast T8/T5/T5HO
- EM – 90 Min. Remote Battery Back-Up
- OSL/SB – Additional splice box for tandem units mounted separately
- WPB – Weatherproof Ballast Box
- CC – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: