


DIMENSIONS



Dimensions are subject to change. For critical applications, verify all dimensions with factory.

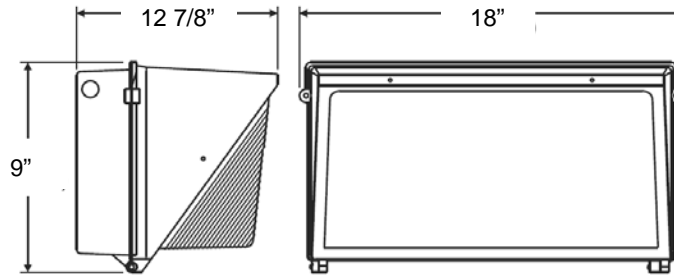

ORDERING

Die cast aluminum housing with integral hinging feature for ease of maintenance. Borosilicate prismatic glass optically designed for optimum light distribution. Optional polycarbonate shield for vandalproof protection over the glass refractor. Textured anodized aluminum reflector designed in conjunction with diffuser for maximum efficiency. Threaded apertures for conduit and optional photocell. Fully gasketed weather resistant construction. For wall mounting directly over standard 4" outlet box or with surface conduit. Optional stainless steel wire guard and or tamperproof hardware is available for vandal resistance. Ideal for use in wattages of up to 250w to 400w metal halide or high pressure sodium.

HOUSING

Rugged die cast aluminum housing.

ELECTRICAL

For HID: Ballast is pre-wired, CWA HPF, core and coil with dry film capacitor and starter (if required).

SHIELDING

Prismatic borosilicate glass is standard.

FINISH

Baked on premium architectural bronze for maximum durability.

CERTIFICATION

All units bear UL label. Made in U.S.A. ARRA compliant.

<u>MODEL</u> WBC	<u>WATTAGE</u>	<u>TYPE</u>	<u>VOLTAGE</u>
	250	PSMH-	120
	320	Pulse Start	277
	350	Metal Halide	480
	400		MULTI
	100	HPS-High	
	150	Pressure	
	250	Sodium	
	400		
	80	IND-	UNV
	100	Induction	
	120		
	150		

OPTIONS:

- PC** – Photocell (Specify Voltage)
- TP** – Tamperproof hardware
- GLR** – Fusing
- QZ** – Quartz Restrike
- CC** – Custom Color



JOB NAME:
FIXTURE TYPE:
MODEL NO: